

Built-in Appliances



BOSCH
Invented for life



Bosch understands your needs.

The kitchen has been universally voted as the most popular place in every home. It's no longer a place to just cook but also a place to entertain guests or to indulge in quiet conversation. Now you can transform your kitchen into the ideal social space with a wide range of award-

winning Bosch home appliances. For over seven decades, our innovative technology and superior performance have been making lives easier and healthier. Designed to suit your lifestyle, Bosch home appliances offer you convenience, reliability and peace of mind.



Ovens - Features and benefits

Our research indicated that over half of consumers would like an oven that is easier to clean. That's why at Bosch we have developed ovens with highly effective self-cleaning options to meet this demand. Heavy soiling may leave residue, which burns in, reducing efficiency and limiting the lifespan of the surface.

Contemporary Designed Interior



All ovens have a smooth grey GraniteEnamel interior, which is scratch-resistant, easy to clean and withstands erosion from foodstuffs like fruit acids.

All Bosch ovens have a unique signature design with contemporary angular bar handles and centralized LED displays.

EcoClean




The highly effective automatic self-cleaning process called EcoClean is a world innovation. The oven's patented lining is made up of thousands of microscopic porous oxygen-filled ceramic spheres. When the oven heats up during the cooking process, oxygen is released from the spheres and causes any grease or

waste deposits on the lining to break down or oxidize, leaving the oven liners sparkling clean. The rear wall is coated as standard; coatings are also available for the top and sides as optional extras.

Pyrolytic Self-cleaning

Offering the ultimate in self-cleaning, this feature heats the oven to approximately 480°C and burns off any deposits, leaving a clean oven. Simply wipe away a fine layer of residue with a damp cloth.

Easy Clean Door

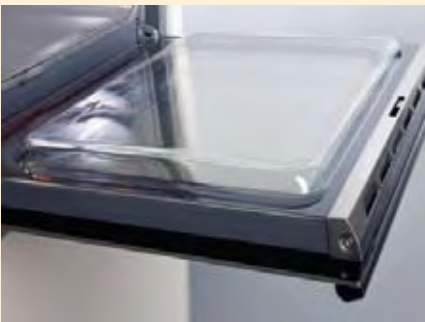

The full-glass inner door has no joints or screws which not only looks sleek but is extremely easy to clean. If required, the entire door can be quickly and easily removed to provide unrestricted access to the oven interior for cleaning.

Large Oven Capacity



All standard single ovens offer a spacious 58 litre interior capacity, which can easily accommodate a large 32 lb turkey. And with a choice of up to 5 different shelf levels you're always guaranteed total flexibility to meet your cooking needs.

Cooling Fans

A fan circulates cool air around the oven to help cool the appliance and the surrounding furniture.

Multi-function Cooking



Multi-function cooking provides a solution for all your cooking requirements. With a choice of up to 11 different cooking functions, from traditional heating systems to more specialized functions, a Bosch oven will provide you with the flexibility to prepare a variety of meals for you and your family. Preparing a delicious homemade family-sized pizza or a tasty deep frozen dessert is easy with the Pizza Setting functions. This innovative setting delivers cooking power for a perfectly crisp, browned base while keeping the topping moist.

Auto Programmes



Automatic pot roasting is the easiest and most convenient way to cook succulent pieces of meat perfect for those family roasts. Simply place the meat into a lidded dish, choose the programme required, input the weight of the meat and the oven will select the

Ovens - Features and benefits

correct temperature and time required. The results: delicious braised meats, juicy roasts and tasty casseroles without the need for turning or basting. In addition, the lidded dish ensures that all the juices are retained within the dish, reducing the amount of splashing, helping you keep your oven interior clean for longer.

Pop-out Controls



Easy-to-use ergonomic pop-out rotary controls, together with flush-fitting clock control buttons not only make operating the oven easy, they also maintain a clean line when the oven is not in use, which makes cleaning the oven control panel extremely easy.

Safer Touch Doors



Bosch ovens have double or triple glazed doors with reflective inner glass to keep more of the heat in the oven and ensure the temperature of the door on the outside is well within levels allowed by international standards. However, care should always be taken, particularly with small children, while the oven is operational.

Automatic Switch-off Function



If left unattended, the electronic ovens will switch off after a specified time. For added comfort, for example when basting a roast, the heating fan and element switch off when the door is opened. All electronic models feature a light which can be switched on or off at the fascia panel.

Temperature Range	Automatic switch-off after:
20 - 120°C	24 hours
121 - 200°C	6 hours
201 - 250°C	3 hours
251 - 300°C	2 hours

Safety

Not only for your child, but also for your own. The integrated **child safety function** deactivates all operations of the oven, and prevents it from being switched on by mistake.


Convenience



The **comfort oven light** consists of two lamps, which provide especially bright illumination of the oven interior. This is particularly useful when several shelves are in use simultaneously. The **SoftLight** function ensures that the halogen lamps are gently brightened and dimmed.



The **multi-function clock** includes time and alarm modes and is also available with start and stop features. The clock is used to set the switch-on and switch-off of the oven. Its simple operation and clearly laid-out display, including the oven functions, underlines the practical nature of the multi-function clock. A new addition is the child-safety button, which prevents the oven from being switched on accidentally.

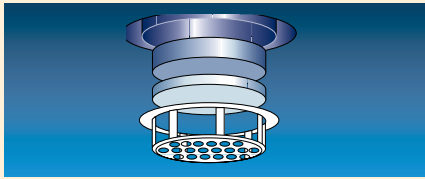

Grease and odour catalyst: This 'mini cooker hood' in the oven ceiling cleans the air vented from the oven, removing grease and odours. The easy to clean metal grease filter is dishwasher proof and deposits collected on the catalytic filter are burned off automatically by heat generated in the oven.



The **sliding oven** offers a maximum level of convenience and safety. This means it is no longer necessary to reach into the oven to test, baste or remove the roast. The pull-out trolley is accessible from both sides. Furthermore, the entire shell can be removed to enable thorough cleaning.

Ovens - Features and benefits

Deep Pan



Available as an optional accessory, this extra deep large pan has a capacity of 10 litres and is ideal for grilling or roasting on a big scale. It's perfect for big grills, roasting turkeys or cooking up party quantities of lasagna.

Fully Extendable Shelf Rails



The convenient telescopic shelf rails allow you to pull out the oven shelves to access an item without having to lift out the oven. Ideal for basting or for tasting quickly and safely, the rails are fitted with bearings for smooth and stable running and, thanks to a locking mechanism, the shelf cannot slide out of its tracks. Available as an optional accessory for selected Bosch ovens, each set is supplied with rails for three shelf levels.

The EU Energy Label

To help you choose the most energy-efficient appliances, the EU has introduced an energy-rating scheme and all appliances must display an EU Energy Label. The most efficient rating is 'A' and the least efficient is 'G'. All Bosch ovens have been given an A rating. The scale does not imply any assessment of the actual performance of the appliance, such as baking or roasting for effectiveness.

Energy		Electric Oven
Manufacturer		BOSCH
Model		HBN430550B
More efficient	A B C D E F G	A
Less efficient		
Energy consumption (kWh)		0.89
Heating function:	Conventional	0.79
	Forced air convection	
(Based on standard load)		
Usable volume	(Liters)	
Size:	Small Medium Large	←
Noise: (dB(A) re 1 pW)		
Further information is contained in product brochures.		
Norm EN 50304 (Electric ovens) Energy Label Directive 2002/90/EC		

N.B.: Not every feature detailed above is included on every product within this section. Please refer to the individual product copy / product information table.



Ovens - Signs of good cooking

Heating Methods



Conventional Baking

Breads, pastries and cakes benefit from a more moist cooking environment. Therefore, this setting retains moisture created during cooking, preventing your baking from drying out.



Bottom Heat Only

A crisp underside to pizza bases and pastry cases can be achieved by simply activating the element concealed in the base of the oven. Ideal for preparing food in a water bath or for browning from underneath.



Variable Small Grill

The centre section of the grill element is selected for grilling - an economic way to grill smaller quantities of food.



Fast Heat

This time-saver preheats the oven 35-50% faster by using all the heating elements at once. Available as an automatic function on all electronic ovens and manually on many other models.

Automatic Fast Heat

After reaching the set temperature, the oven switches automatically to the decreased heating method.

Manual Fast Heat

After reaching the set temperature, the rotary knob has to be adjusted manually according to the required heating method.



Plate Warming

Food stays warm for longer if served in preheated ovenware. The plate warming feature allows you to preheat porcelain ovenware. Simply select hot-air cooking and adjust the temperature to between 30°C to 65°C. When the stacked plate symbol appears, the oven has reached the desired temperature. Always use an oven cloth or oven gloves when handling preheated ovenware (EPS Dialogue oven only).



Conventional Top and Bottom Heat

Heat is generated by an element concealed beneath the oven floor and the grill element. As the heat travels to the centre of the oven by natural convection, the centre of the oven is the best position to obtain the temperature selected. Most foods can be cooked using this system, but is best suited for food which requires a dark crisp finish or long, slow cooking.



Pizza Setting

Designed with the pizza-lover in mind, but equally useful for quiches and tarts, this innovative setting delivers cooking power for a perfectly crisp, browned base while keeping the topping moist. It's suitable for frozen food and in many cases, preheating is no longer required.



Hot Air Grill

An ideal cooking method for meat and poultry where a rotisserie effect is desired. The grill and fan operate alternately, with the grill producing the heat and the fan distributing the heat around the oven. This results in crisp, evenly cooked food and requires up to 50% less energy than traditional roasting.



Intensive Heat

This time-saver delivers immediate intense heat from below which is particularly effective for foods with a crispy base such as pizzas. It also makes it unnecessary to preheat the oven when baking cakes and quiches. This setting is also particularly suitable for baking with tin, glass or porcelain moulds, which tend to reflect heat or are poor conductors of heat.



3D Hot Air Cooking

Heat is produced by the element around the fan and then evenly distributed throughout the oven. It's equally effective for batch baking and roasting. This optimum heat distribution and constant circulation of hot air means that sweet and savoury items can be evenly cooked on three shelf levels at the same time.



Defrost Setting

We have introduced a defrost setting on almost all of our ovens, perfect for gently defrosting meat, poultry, bread, cream cakes and much more. It's also ideal for defrosting non-sensitive foods.



Variable Large Grill

All Bosch ovens feature a thermostatically controlled full width variable grill. The thermostat cycles switch on and off to maintain the required temperature. The grill element is recessed into the oven roof, which maximizes usable space. For added efficiency, grilling is performed with the oven door closed.



Hold Warm

The height of convenience, this new function keeps food items warm at temperatures between 66°C and 100°C at the touch of a button. After all, cooking can be a juggling act and hungry people want seconds. Available on all electronic models.



Look forward to the same great results in half the space. With **Bosch** compact appliances.

The Bosch range of compact combination ovens and microwaves make it possible to put good food on the table fast. Thanks to halogen light technology, our revolutionary QuantumSpeed microwave combination oven dramatically reduces cooking times without compromising on taste or finish. This means you can have a leg of lamb browned to perfection and ready to carve within 40 minutes.

Our high-spec combination oven combines the benefits of a conventional oven with those of microwave power. It has five cooking functions in

all, including a variable grill and hot air cooking. To complement the sleek new look of our kitchen appliances, both ovens have new angular bar handles and the QuantumSpeed also has the redesigned door with a larger viewing window. Naturally, we also offer a range of beautiful and well specified built-in microwaves designed to enhance any contemporary kitchen.

Compact Ovens - **Features and benefits**



Combi Ovens - **Features and benefits**

Choose flexibility with the Bosch compact oven that can also be used as a microwave.

With even less time to cook, the new Bosch compact oven with an integrated microwave means you can still serve healthy food, fast. Our new oven not only looks good with its improved fascia design, but thanks to the innowave technology offers improved performance and an interior that is 35% bigger. There are 5 cooking functions to choose from including a 900 W microwave. The wire shelf now has a 49% larger surface area than the previous model and the oven can be installed directly into a 60 cm wide unit without a trim making it more convenient than ever.



Innowave

Inverter technology achieves lower power consumption and improved performance. By maintaining an even delivery of power rather than the traditional method of pulsing on and off, this new compact oven now delivers up to 900 W of constant microwave power. It's 5 kgs lighter and has an increased capacity of 35%, without any change to the ovens outer dimensions.

3-stage Programming

Allows you to programme the microwave to automatically run up to 3 power levels and cooking times consecutively.

Safe Operation

The oven has a child proof lock to prevent children accidentally switching it on.

Compact Microwave Combi Oven



Installing a compact microwave combination oven above any of the superb Bosch ovens has long been a popular option, but the Bosch range of compact appliances is even more versatile to better meet all your requirements. Our latest addition to the range is a new 45 cm deep compact single oven, which extends the combination of appliances even further.

Why not consider linking any one of these products either together, with an oven, with a warming drawer or even teaming all three together?

QuantumSpeed - Features and benefits

Compact Ovens

Bosch’s QuantumSpeed oven rapidly reduces cooking times whilst producing high quality cooking. You can have a crispy pizza on the table in six minutes or a leg of lamb browned to perfection and ready to carve in around 40 minutes. It is beautifully styled with a curved stainless steel interior and is also easy to use.





Spacious Curved Interior



The large curved stainless steel interior makes life even easier for the discerning cook. Not only is it big enough to take a family sized chicken or a 14-inch pizza, its unique curvature means it’s easier to clean. Just wipe away any grease deposits with warm water and a cloth. This curved design also allows a more even distribution of heat and light energy within the cavity. The enameled turntable has a diameter of 40 cm, making it the largest on the market.



Bosch has developed this revolutionary oven for busy people who don’t want to compromise on good food. Unlike conventional microwaves and combination ovens, QuantumSpeed adds halogen light technology to its repertoire. Combined with microwave technology, a Quartz grill and intensive heat settingsm cooking time is dramatically reducedm producing sumptuous food.

	QuantumSpeed saves precious time	Weight (g)	Conventional cooking time	QuantumSpeed cooking time	Time Saving %
	Boned leg of lamb	1500	120 minutes	43 minutes	64%
	Thin - crust pizza	320	20 minutes	6 minutes	70%
	French fries	450	30 minutes	12 minutes	60%
	Mini spring rolls	400	21 minutes	10 minutes	52%

Simple-to-Use

The menu LED and rotary controls make operating the QuantumSpeed as easy as turning on a light. Its 51 automatic preset cooking programmes, from roast lamb and vegetables to pizza and fries, mean you can cook your favourite foods in record time. Once a pre-programmed setting is selected the oven uses the optimum combination of cooking methods, temperature and time to cook food as quickly as possible. The oven can also be operated manually.

Four Heating Methods Combined

The 51 automatic settings deliver the optimum combination of the four heating methods. So when cooking a chicken, select the appropriate preset and input the weight. The quartz and halogen elements deliver immediate heat and the microwave cooks the food from within. The powerful standard elements ensure that the chicken is browned and crisped to perfection.

Combi Oven, EcoClean



Combination Oven/Microwave with Inverter, 60 cm


HBC86K751 - s/steel

- 900 W microwave
- Inverter technology: reduced time and energy consumption
- 6 heating methods: Top/bottom heat, 3D hot air, variable grill, hot air grill, intensive heat, bottom heat
- 5 power settings
- EcoClean: rear wall and ceiling
- Interior cavity volume: 42 litres
- 6 memory settings
- 3-stage programming (microwave)
- 51 cook-by-weight programmes
- Electronic control with digital clock
- Large plain text display (heating methods and automatic programmes)
- Rapid heating up
- Minute minder signal
- Electronic delay timer
- Oven light

- Accessories
- 1 cookbook
 - Combination grid
 - Universal pan

- Connection and Consumption Rating
- Total connection load: 3.6 kW
 - Nominal voltage: 220 - 230 V
 - Frequency: 50 Hz
 - Length of connecting cable: 1.8 m

- Dimensions
- Appliance dimensions (HxWxD) 45.4 x 59.5 x 53.1 cm
 - Built-in dimensions (HxWxD) 45.0 x 56.0 x 55.0 cm

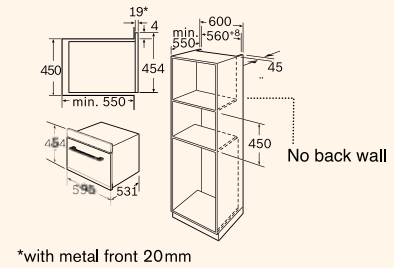

Combi Oven, QuantumSpeed



Combination Oven/Microwave, 60 cm


HBC86Q651 - s/steel

- 900 W microwave (5 power settings)
- 4 heating methods: Top/bottom heat and hot air up to 250°C, variable grill (3 settings), intensive heat
- Separate bottom heat
- Easy operation electronics
- 3-stage programming (microwave)
- 6 memory settings
- 5 cook-by-weight programmes
- Interior cavity volume: 34 litres
- 40 cm enamel turntable
- Cooking time and time of day display
- Plain text display for heating methods

- Accessories
- Higher grid
 - Lower grid
 - 1 cookbook

- Connection and Consumption Rating
- Total connection load: 3.6 kW
 - Nominal voltage: 230 V
 - Frequency: 50 Hz
 - Length of connecting cable: 1.5 m

- Dimensions
- Appliance dimensions (HxWxD) 45.8 x 59.5 x 46.7 cm
 - Built-in dimensions (HxWxD) 45.0 x 56.2 x 55.0 cm

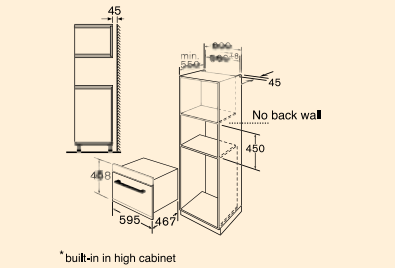

Combi Steam Oven



Combi Steam Oven, 60 cm


HBC36D750 - s/steel

- Internal steam generation
- Steam cooking range 40-100°C
- Hot air cooking range 30-230°C
- 10 cooking methods/programmes: Steam, Hot-air, Combination hot air and steam cooking, Reheat, Dough proving, Defrost, Gentle cooking, Plate warming, Keep warm, Cleaning
- 52 automatic programmes
- Clear text display
- Heating-up indicator
- Memory function
- Retractable controls
- Double glazed with full glass inner door
- Halogen interior light
- Clear text display for highlighting cooking functions and automatic recipe programmes
- Time delay
- Time of day display
- Minute minder
- Memory function
- Child safety
- 32 litre capacity, stainless steel interior
- 1.3 litre external water tank

- Accessories
- 1 grid
 - 1 stainless steel tray GN 1/3 punched 40 mm deep
 - 1 stainless steel tray GN 1/3 unpunched 40 mm deep
 - 1 stainless steel tray GN 2/3 punched 40 mm deep
 - 1 stainless steel tray GN 2/3 unpunched 40 mm deep
 - 1 stainless steel tray GN 2/3 unpunched 28 mm deep

- Connection and Consumption Rating
- Total connection load: 1.9 kW
 - Nominal voltage: 220-240 V
 - Frequency: 50 Hz
 - Length of connecting cable: 1.8 m

- Dimensions:
- Appliance dimensions (HxWxD) 45.4 x 59.4 x 67.0 mm
 - Built-in dimensions (HxWxD) 45.0 x 56.0 x 55.0 mm



Steam Oven



Steam Oven, 60 cm


HBC26D550 - s/steel

- Internal steam generation
- Steam cooking range 40-100°C
- 5 cooking methods/programmes: Steam, Reheat, Dough proving, Defrost, Cleaning
- 37 automatic programmes
- Clear text display
- Heating-up indicator
- Memory function
- Retractable controls
- Double glazed with full glass inner door
- Halogen interior light
- Clear text display for highlighting cooking functions and automatic recipe programmes
- Time delay
- Time of day display
- Minute minder
- Memory function
- Child safety
- 35 litre capacity, stainless steel interior
- 1.3 litre external water tank

- Accessories
- 1 grid
 - 1 stainless steel tray GN 1/3 punched 40 mm deep
 - 1 stainless steel tray GN 1/3 unpunched 40 mm deep
 - 1 stainless steel tray GN 2/3 punched 40 mm deep
 - 1 stainless steel tray GN 2/3 unpunched 28 mm deep

- Connection and Consumption Rating
- Total connection load: 1.9 kW
 - Nominal voltage: 220-240 V
 - Frequency: 50 Hz
 - Length of connecting cable: 1.8 m

- Dimensions:
- Appliance dimensions (HxWxD) 45.4 x 59.4 x 52.0 mm
 - Built-in dimensions (HxWxD) 45.0 x 56.0 x 55.0 mm





Bosch Microwave Ovens offer easy and practical solutions for your kitchen.

The Bosch Microwave Oven adds elegance to your kitchen with its sleek finish, while its contemporary programming options are guaranteed to meet your every demand.

Thanks to the new innowave technology, now you can save 10% on time and 15% on energy, with cooking results that will leave you craving for more.

Microwave Ovens - Features and benefits

Innowave



Inverter technology gives top performance and lower power consumption. It achieves savings of 10% on time, 15% on energy, reduces the actual microwave weight, adds 18% to interior space without any change to the oven's outer dimensions and turns out excellent cooking results.

Automatic Weight Programme

Press the programme button, select the programme number and enter the weight. The oven will automatically calculate the optimum power and time required to cook or defrost your dish to perfection.

Memory Function

Store two of your favourite recipe instructions, then simply press the memo button to repeat the sequence at any time.

3-stage Programming

Allows you to programme the microwave to automatically run up three power levels and cooking times consecutively.

Sleek Finish

Bosch microwaves come with a new ventless trim kit for a really sleek finish.

Digital Display



Clearly indicates the power level and cooking duration selected. All Bosch microwaves also features a 24-hour digital clock and timer control up to 99 minutes.

Pop-out Control



The timer is controlled via a pop-out rotary control, which helps to maintain a clean line when the microwave is not in use.

Microwave Ovens

MWO with Inverter and Grill



Microwave Oven with Inverter and Grill

HMT85G650 - s/steel

- 900 W microwave
- 5 power settings: 1000/600/360/180/90 W
- Variable grill: 1300 W
- Inverter technology: reduced time and energy consumption
- Easy operation electronics
- 3-stage programming
- 2 memory functions
- 10 cook-by-weight programmes
- Interior cavity volume: 21 litres
- Digital clock with time of day display

Accessories


- 1 glass pan
- 1 grid

Connection and Consumption Rating

- Total connection load: 1.9 kW
- Nominal voltage: 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1.5 m

Dimensions

- Appliance dimensions (HxWxD)
38.2 x 59.5 x 32.0 cm
- Built-in dimensions (HxWxD)
36.2 x 56.0 x 30.0 cm



MWO with Inverter and Grill



Microwave Oven with Inverter and Grill

HMT75M651 - s/steel


- Can be built in a 60 cm wall cupboard or highboard cabinet.
- 5 power levels: 800 W, 600 W, 360 W, 180 W, 90 W
- User-friendly electronics with push-buttons and pop-out controls
- 4 Automatic weight defrosting programmes
- 3 automatic weight cooking programmes
- Memory function (1 recipe setting)
- LED clock and timer
- 17 l capacity, stainless steel interior

Connection and Consumption Rating

- Total connection load: 1127 kW
- Nominal voltage: 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1.3 m

Dimensions:

- Appliance dimensions (HxWxD)
28.0 x 45.3 x 32.0 mm
- Built-in dimensions (HxWxD)
19.4 x 29.0 x 27.4 mm





When it comes to convenience, **Bosch** has solutions that are just right.

Indulge in the perfect blend of espresso and cappuccino everyday. The Bosch Coffee Machine with the unique AromaWhirl system is designed to brew coffee like the professionals, guaranteeing you flavour and aroma with every cup of coffee.

Add a touch of luxury to your kitchen with the Bosch Warming Drawers. Ideal in combination with our ovens, they are designed with convenience and safety in mind. Now you can keep your china and food warm while entertaining guests.

Coffee Machine and Warming Drawers

Features and benefits

Contemporary Design



Design to coordinate with the Bosch built-in appliance range.

Single Portion Cleaning

single portion CLEANING Each cup of coffee, espresso or cappuccino is always freshly brewed. Pipes are automatically rinsed after use and any residual water is pumped away. Thus, there is no residual water present in the system to contaminate future processes. Fresh water guarantees fresh coffee flavour and aroma every time.

Unique 'AromaWhirl' system

aroma whirl system This revolutionary brewing system guarantees a unique flavour. The coffee is swirled under high pressure in a brewing chamber, which releases more aroma than ever before.

Warming Drawer



Bosch warming drawers are the height of versatility and the ideal partner for a Bosch oven. Perfect for preheating crockery and utensils, a Bosch warming drawer is also designed to keep food and drinks warm. It can warm up pancakes or wraps, gently thaw delicate or perishable foods and allow yeast dough to rise. The drawers are available in two sizes and come in a sleek brushed steel finish, that is guaranteed to enhance any kitchen as well as compliment other Bosch kitchen appliances. The drawers have full extendable telescopic rails that make for safe and smooth operation and a toughened glass heating plate, which is exceptionally easy to clean.

The 29 cm model which can hold up to 12 place settings combines with a Bosch single oven to fit into a double oven housing, while the 14 cm drawer, which takes up to 6 place settings, can be fitted with a compact oven or QuantumSpeed to fit into a single oven housing. For extra large households or those who entertain on a lavish scale, 2 drawers plus a compact oven or QuantumSpeed will fit a double oven housing.

Coffee Machine and Warming Drawers

Coffee / Espresso Machine Fully Automatic



Coffee / Espresso Machine, Fully Automatic

TKN68E751 - s/steel

- Professional preparation of coffee and espresso
- Freshly ground coffee beans for every new cup
- USP: AromaWhirl brewing system
- Thermo block pump pressure: approx. 15 bar
- 400 g container for fresh coffee beans
- High quality conical grinding gear of hardened steel with adjustable grinding degree
- 6 settings for amount, strength and cup size
- 1-2 cups dispensing option per brewing cycle
- Frothing nozzle and hot water dispenser
- LCD dialogue display with plain text
- Energy saving standby function
- 1-12 hours programmable On/off
- Single portion cleaner
- Fully automatic rinsing programme
- Automatic cleaning / de-scaling tab
- Ideal in combination with HSC140650 in 60 cm niche

Accessories


- 2 cleaning tabs
- 2 de-scaling tabs
- Measuring spoon for ground coffee
- Test strip to check water hardness

Connection and Consumption Rating

- Total connection load: 1.3 kW
- Nominal voltage: 220 - 240 V
- Frequency: 50 Hz

Dimensions

- Appliance dimensions (HxWxD) 45.8 x 59.4 x 53.2 cm
- Built-in dimensions (HxWxD) 45.0-45.2 x 56.0-56.8 x 55.0 cm



Warming Drawer 29 cm height



Warming Drawer

HSC290651 - s/steel


- 40 - 80°C variable temperature control
- Applications: Warm dishes, preheat crockery, defrost, prepare yoghurt, prove yeast dough, melt chocolate, dissolve gelatin, gentle cooking
- Stainless steel interior
- Hard glass heating plate
- Fully extendable telescopic rails
- Up to 25 kg load capacity
- Indicator lights
- Fits 40 plates and 120 cups

Connection and Consumption Rating

- Total connection load: 0.81 kW
- Nominal voltage: 220 - 240 V
- Frequency: 50Hz - 60Hz

Dimensions

- Appliance dimensions (HxWxD) 29.0 x 59.5 x 53.5 cm
- Built-in dimensions (HxWxD) 29.0 x 56.2 x 55.0 cm



Warming Drawer 14 cm height



Warming Drawer

HSC140651 - s/steel


- 40 - 80°C variable temperature control
- Applications: Warm dishes, preheat crockery, defrost, prepare yoghurt, prove yeast dough, melt chocolate, dissolve gelatin, gentle cooking
- Stainless steel interior
- Hard glass heating plate
- Fully extendable telescopic rails
- Up to 25 kg load capacity
- Indicator lights
- Fits 12 plates and 80 cups
- Ideal in combination with TKN68E751 in 60 cm niche

Connection and Consumption Rating

- Total connection load: 0.81 kW
- Nominal voltage: 220 - 240 V
- Frequency: 50Hz - 60Hz

Dimensions

- Appliance dimensions (HxWxD) 14.0 x 59.5 x 53.5 cm
- Built-in dimensions (HxWxD) 14.0 x 56.2 x 55.0 cm





At **Bosch**, we have tailored our hobs to meet your need to achieve the perfect cooking results.

Bosch high-specification ceramic hobs provide the ultimate in wipe-once maintenance. Flexible cooking zones make them ideal for use with the smallest to the largest pans. Whichever Bosch

hob you opt for, you can be sure of a stylish, easy to clean, ultra-responsive piece of equipment that will enhance your kitchen and cooking experience.

Ceramic Hobs - Features and benefits

Ceramic Hobs



Can be installed as stand-alone units. The controls are on the hob.

Dominos



With the Domino modular hobs, you have the freedom of designing your own cooking centre. Using a combination of gas, ceramic hob, wok burner or barbecue grill, these units can be built in separately or combined for the ultimate cooking experience.

Design Lines

Surround Frame



Flat, easy to clean **surround frame** with no joints. The frame is fixed flush to the glass with no visible sealant. The result not only looks neater, but is also simple to clean and maintain.

Front Profile



The new, elegant, undecorated design with faceting at the sides and a metal strip at the front. Simple but aesthetic. Can be combined side-by-side with the Domino modules via connection strips.

Time Saving

HighSpeed Ceramic Glass



The HighSpeed ceramic glass with a high temperature range and optimised high temperature settings in the heating elements reduces cooking times by up to 20% and makes “fast frying” even faster. Deep frying frozen food now leads to far better results. Quicker than standard ceramic zones or electric sealed plates.

Automatic Boil Start

The cooking zone may be set to operate for a period of time before reverting back to a preset power level.

Auto Cook Electronics

The cooking zone may be set to operate at full power for a period of time before reverting to a preset power level. No intervention required and no unnecessary loss of electricity.

Safety

Child Safety Lock

All hob functions may be guarded by pressing a single child-proof safety button. Pressing the main sensor button for longer, deactivates the hob. Very safe, as no unauthorised or unintended use is possible.

Safety Cut-Off


Special sensors under the glass of the touch-control hobs cut off the power if there is a risk of damage to the electronic controls. In addition, if you leave the hob on inadvertently, it will automatically switch off after a period of time, which depends on the latest operation and selected power.

Stop Function

The stop sensor controls the stop function. If the hob is in use, press the stop sensor to immediately cut off all cooking zones. You can reactivate them within 3 minutes by pressing the button again.


Ceramic Hobs - Features and benefits

Residual Heat Display



The centrally located residual heat display field indicates each individual cooking zone via red lamps and its residual heat. Safe and economical, as the remaining heat may be used to keep food hot.

The 2-Stage Residual Heat Display



The 2-stage residual heat display indicates sufficient residual heat for further cooking or keeping food hot with a capital ‘H’ and a lower case ‘h’ for hot, yet no longer useful residual heat. However, the zone is still hot enough for caution. Energy saving, due to maximum use of the residual heat.

Comfort


Integrated Timer

The first integrated timer for hobs. The timer function can be selected for each cooking zone and for all cooking zones simultaneously. It allows you to programme the desired cooking time, even during the cooking process. If the time is over, the cooking zone will switch off automatically. The timer function can be used as an alarm clock, too (cooking zones won’t switch-off, if this function is activated).

Memory Function

Power and time for each cooking zone can be programmed and retrieved. There is a maximum of 5 different times combined with power. The complete time is limited to 99 minutes.

TouchControl

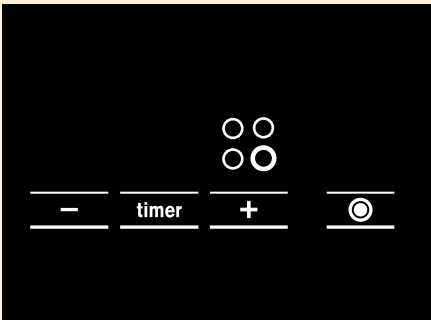

The sensor buttons are integrated at the front of the ceramic glass hob and are activated with a touch of your finger.

Professionalism

Perfect flexibility in the selection of the cooking zone for all requirements and great results with whatever kind of pans you use:

- Two-ring cooking zone, with additional, independent outer ring.
- Three-ring cooking zone, with diameters of 21 cm and 27 cm. Even greater flexibility – accommodates three pan sizes perfectly.
- Roasting zone with extendable side heating as required.
- Combi cooking zone, combination of two-ring cooking zone and roasting zone.
- Espresso zone, 10 cm in diameter, especially suitable for espresso or Turkish coffee pots and butter pans.
- 5 cooking zones, 90 cm hob.


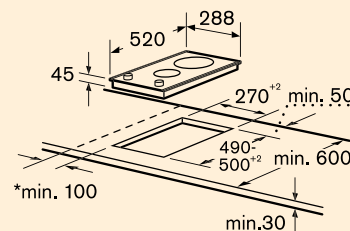

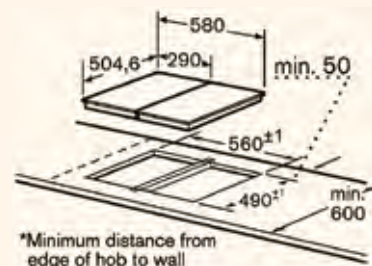


When it comes to built-in kitchens, Bosch’s professional competence is apparent from the 19 mm front panel gauge of its ovens, for harmonious integration in the kitchen units. The equipment height has also been optimised to simplify hob installation in work surfaces as thin as 20 mm, e.g. those made of granite.

Ceramic Hobs

Ceramic & Electric Hobs

TouchControl	TouchControl		SuperQuattro Touch	Electric Hob
 <div>90 cm H h h H</div>	 <div>60 cm •• ••</div>	 <div>60 cm •• ••</div>	 <div>60 cm •• ••</div>	 <div>60 cm</div>
Ceramic Hob, 90 cm	Ceramic Hob, 60 cm	Ceramic Hob, 60 cm	Ceramic Hob, 60 cm	Electric Hob, 60 cm
PKV975T02 - s/steel	PKN645E01 - s/steel	PKE615C01E - s/steel PKE612C01E - white not shown	PKF615Q01E - s/steel	NCT615C01 - s/steel NCT612C01 - white not shown
<ul style="list-style-type: none">• TouchControl• 5 HighSpeed cooking zones including:<ul style="list-style-type: none">1 three-ring zone1 two-ring zone1 combi zone1 espresso zone• 17 fully electronic settings for each zone• Auto cook electronics• Automatic boil start• TopControl digital display• 2-stage residual heat indicator for each zone• Safety cut-off• Main switch• Child safety lock• Integrated timer with switch-off function for each zone• Timer with switch-off function for all zones• Buzzer• Memory function for each cooking zone• Can be used in combination with domino modules via connection strips• HighSpeed ceramic glass with décor• Minimum worktop thickness: 2 cm	<ul style="list-style-type: none">• TouchControl• 4 HighSpeed cooking zones including:<ul style="list-style-type: none">1 extendable roasting zone1 two-ring zone• Zone switching via separate sensor button• 17 fully electronic settings for each zone• Auto cook electronics• TopControl digital display• 2-stage residual heat indicator for each zone• HighSpeed glass ceramic with décor• Minimum worktop thickness: 2 cm <p>Accessories</p> <ul style="list-style-type: none">• Glass scraper <p>Optional Accessories</p> <ul style="list-style-type: none">• HEZ5920 (inserted floor 60 cm for installation above furniture, eg: drawer) <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">• Total connection load: 7 kW• Nominal voltage: 220 - 240 V• Frequency: 50Hz - 60Hz <p>Dimensions</p> <ul style="list-style-type: none">• Appliance dimensions (HxWxD) 5.1 x 57.6 x 51.8 cm• Built-in dimensions (HxWxD) 4.7 x 56.0 x 50.0 cm	<ul style="list-style-type: none">• 4 HighSpeed cooking zones• Residual heat indicator for each zone• HighSpeed glass ceramic without décor• Minimum worktop thickness: 2 cm <p>Accessories</p> <ul style="list-style-type: none">• Glass scraper <p>Optional Accessories</p> <ul style="list-style-type: none">• HEZ5910 (inserted floor 60 cm for installation above furniture, eg: drawer) <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">• Total connection load: 6.6 kW• Nominal voltage: 220 - 240 V• Frequency: 50Hz - 60Hz <p>Dimensions</p> <ul style="list-style-type: none">• Appliance dimensions (HxWxD) 6.0 x 57.6 x 51.8 cm• Built-in dimensions (HxWxD) 4.7 x 56.0 x 50.0 cm	<ul style="list-style-type: none">• SuperQuattro Touch• 4 HighSpeed cooking zones including:<ul style="list-style-type: none">1 two-ring zone• Zone switching via separate sensor button• 9 fully electronic settings for each zone• Auto cook electronics• TopControl digital display• Safety cut-off• Main switch• Child safety lock• HighSpeed glass ceramic with décor• Minimum worktop thickness: 2 cm <p>Accessories</p> <ul style="list-style-type: none">• Glass scraper <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">• Total connection load: 6.6 kW• Nominal voltage: 220 - 240 V• Frequency: 50Hz - 60Hz• Length of connecting cable: 1 m <p>Dimensions</p> <ul style="list-style-type: none">• Appliance dimensions (HxWxD) 5.1 x 57.5 x 50.5 cm• Built-in dimensions (HxWxD) 4.7 x 56.0 x 49.0 cm	<ul style="list-style-type: none">• HighSpeed hotplates• Power ON indicator• Minimum worktop thickness: 3 cm <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">• Total connection load: 7 kW• Nominal voltage: 230 V• Frequency: 50 Hz• Length of connecting cable: 1 m <p>Dimensions</p> <ul style="list-style-type: none">• Appliance dimensions (HxWxD) 5.7 x 58.0 x 51.0 cm• Built-in dimensions (HxWxD) 4.5 x 56.0 x 49.0 cm
 <p>*Minimum distance from edge of hob to wall **Maximum depth</p>	 <p>*Minimum distance from edge of hob to wall **Maximum depth</p>	 <p>*Minimum distance from edge of hob to wall **Maximum depth</p>	 <p>*Minimum distance from edge of hob to wall **Maximum depth</p>	 <p>*Minimum distance from edge of hob to wall **Maximum depth</p>

Domino Modules

Ceramic Domino Hob	Electric Domino Hob	Barbeque Grill
<div><div><div>30cm</div><div><div></div><div></div></div></div></div> <div>Ceramic Hob, 30 cm PKF375C03 - s/steel<ul style="list-style-type: none">• 2 HighSpeed cooking zones including:<ul style="list-style-type: none">• 1 dual zone• Zone switching via knob• Power ON light indicator• 2-stage residual heat indicator for each zone• HighSpeed glass ceramic without décor• Stainless steel profile frame• Can be used in combination with 30, 60 90 cm ceramic hobs (front profile) via connection strips• Minimum worktop thickness: 3 cmAccessories<ul style="list-style-type: none">• Glass scraperOptional Accessories<ul style="list-style-type: none">• HEZ394300 (connection strip)Connection and Consumption Rating<ul style="list-style-type: none">• Total connection load (gas): 2.9 kW• Nominal voltage: 230 V• Frequency: 50 Hz• Length of connecting cable: 1.5 mDimensions<ul style="list-style-type: none">• Appliance dimensions (HxWxD)<ul style="list-style-type: none">• 4.5 x 28.9 x 52.0 cm• Built-in dimensions (HxWxD)<ul style="list-style-type: none">• 4.3 x 27.0 x 49.0 - 50.0 cm<div><p>*Minimum distance from edge of hob to wall</p></div></div>	<div><div><div>30cm</div><div><div></div><div></div></div></div></div> <div>Electric Hob, 30 cm PCX345E - s/steel<ul style="list-style-type: none">• 2 HighSpeed hotplates• Power ON indicator light• Minimum worktop thickness: 3 cmConnection and Consumption Rating<ul style="list-style-type: none">• Total connection load: 3.5 kW• Nominal voltage: 230 V• Frequency: 50 Hz• Length of connecting cable: 2 mDimensions<ul style="list-style-type: none">• Appliance dimensions (HxWxD)<ul style="list-style-type: none">• 3.8 x 28.8 x 50.5 cm• Built-in dimensions (HxWxD)<ul style="list-style-type: none">• 4.3 x 26.8 x 49.0 cm<div><p>*Minimum distance from edge of hob to wall</p></div></div>	<div><div><div>30cm</div><div><div></div><div></div></div></div></div> <div>Barbecue Grill, 30 cm PKU375C03 - s/steel<ul style="list-style-type: none">• Removable cast iron grill• 2 separate adjustable heating elements• Stainless steel grilling trough with lava stones• Power ON indicator• Oil outlet tap• High speed glass ceramic without décor• Removable ceramic glass lid• Stainless steel front profile• Can be used in combination with 30, 60, 80, 90 cm ceramic hobs (front profile) via connection strips• Minimum worktop thickness: 3 cmAccessories<ul style="list-style-type: none">• Glass scraper• Lava stonesOptional Accessories<ul style="list-style-type: none">• HEZ394300 (connection strip)• NEZ31LS (lava stones)Connection and Consumption Rating<ul style="list-style-type: none">• Total connection load: 2.8 kW• Nominal voltage: 220 - 230 V• Frequency: 50 Hz• Length of connecting cable: 1.2 mDimensions<ul style="list-style-type: none">• Appliance dimensions (HxWxD)<ul style="list-style-type: none">• 10.6 x 28.9 x 52.0 cm• Built-in dimensions (HxWxD)<ul style="list-style-type: none">• 19.5 x 27.0 x 49.0 - 50.0 cm<div><p>*Minimum distance from edge of hob to wall</p></div></div>





Bosch hobs give you a chance to test your creativity with its contemporary functions.

Bosch's excellent four and five-burner hobs include features such as electronic ignition, wok-style burners and flame failure safety device. Stunning new models with state-of-the-art tempered hard glass bases are also available.

Gas Hobs - Features and benefits

Gas Hobs



Can be installed as stand-alone units. The controls are on the hob.

Gas Dominos



Are also included in the modular design for flexible solutions.

Combination Burners



All our gas hobs feature different burner combinations for greater flexibility. With HighSpeed, normal and economy burners you can cook more efficiently with a burner that's the right size for the pan. All gas burners feature fully variable controls, which provide you with the flexibility to accurately adjust the heat according to what is being cooked. So whether you need to achieve a rapid boil or a gentle simmer, you have total control every time.

Cast Iron Supports



Cast iron pan supports are both beautifully stylish and highly durable, providing solid and robust support for your cooking pans whilst adding a strong contemporary look to your kitchen.

Time Saving

Gas provides quick heat that's easy to control. It brings things quickly to a boil, allows fine temperature adjustments, and there is no heat loss after switching off.

Safety

Nearly all Bosch gas hobs have a **thermoelectric safety device** mechanism integrated within the burner. This interrupts the gas flow automatically should the flame be extinguished for any reason.

Convenience

Just press and turn the knob and the burner ignites. The **one-hand ignition** is just simple, safe and convenient.

Professionalism

The **WOK burner** is an indispensable item of equipment for use in Asian cuisine. The advantages of the large cast iron pan can only be properly exploited with the right kind of burner, since ideally, a powerful wok is used over an open flame.

Gas Hobs

Glass Ceramic

90 cm



Ceramic Gas Hob, 90 cm

PGV975K01E - s/steel

- 1 intensive, 2 standard, 1 economy burner
- 1 WOK burner
- One-hand ignition
- Thermoelectric safety device
- Integrated spark plug and safety device
- Cast pan rests with rubber feet
- HighSpeed glass ceramic without décor
- Stainless steel front profile
- Preset of natural gas: 20 mbar
- Liquid gas jets supplied: 28-30/37 mbar
- Minimum worktop thickness: 3 cm

Accessories


- WOK attachment ring
- Cross support for Espresso

Connection and Consumption Rating

- Total connection load: 13.3 kW
- Nominal voltage: 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1.5 m

Dimensions

- Appliance dimensions (HxWxD)
4.5 x 90.3 x 52.0 cm
- Built-in dimensions (HxWxD)
4.3 x 85.0 x 49.0 cm



*Minimum distance from edge of hob to wall 150 mm
**Position of gas connection in cut out

90 cm



Gas Hob, 90 cm

PCL985FEU - s/steel

- 1 intensive, 2 standard, 1 economy burner
- 1 WOK burner
- One-hand ignition
- Thermoelectric safety device
- 3-piece flat steel pan rests, enamelled with rubber feet
- Integrated spark plug and safety device
- Preset of natural gas: 20 mbar
- Liquid gas jets supplied: 28-30/37 mbar
- Minimum worktop thickness: 4 cm

Accessories


- WOK ring
- Cross support for Espresso

Connection and Consumption Rating

- Total connection load (gas): 12.2 kW
- Total connection load (electric): 0.001 kW
- Nominal voltage: 220 - 240 V
- Frequency: 50Hz - 60Hz
- Length of connecting cable: 1.5 m

Dimensions

- Appliance dimensions (HxWxD)
5.3 x 91.5 x 52.0 cm
- Built-in dimensions (HxWxD)
4.3 x 85.0 x 49.0 cm



*Minimum distance from edge of hob to wall 150mm
**Position of gas connection in cut out

90 cm



Gas Hob, 90 cm

NGT915ENE - s/steel

- 1 intensive, 1 standard, 1 economy burner
- 1 WOK burner
- One-hand ignition
- Thermoelectric safety device
- Enamelled flat steel pan rests with rubber feet
- Integrated spark plug and safety device
- Preset of liquid gas: 28-30/37 mbar
- Natural gas jets supplied: 20 mbar
- Minimum worktop thickness: 4 cm

Accessories


- WOK attachment ring
- Espresso set

Connection and Consumption Rating

- Total connection load (gas): 11 kW
- Total connection load (electric): 0.001 kW
- Nominal voltage: 220 - 240 V
- Frequency: 50Hz - 60Hz
- Length of connecting cable: 1.5 m

Dimensions

- Appliance dimensions (HxWxD)
5.0 x 86.0 x 50.0 cm
- Built-in dimensions (HxWxD)
3.5 x 84.0 x 48.0 cm



*Minimum distance from edge of hob to wall 80 mm

Gas Hobs

Gas Hobs



Gas Hob, 70 cm

PCL755FEU - s/steel

- 1 high speed, 2 standard, 1 economy burner
- 1 WOK burner
- One-hand ignition
- Thermoelectric safety device
- Cast iron rests with rubber feet
- Stainless steel effect fixed controls
- Preset of natural gas: 20 mbar
- Liquid gas jets supplied: 28-30/37 mbar
- Minimum worktop thickness: 3 cm

Accessories

- WOK attachment ring

Optional Accessories


- HEZ29810 (Small pot support)

Connection and Consumption Rating

- Total connection load (gas): 11 kW
- Total connection load (electric): 0.006 kW
- Nominal voltage: 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1 m

Dimensions

- Appliance dimensions (HxWxD)
5.6 x 70.2 x 52.0 cm
- Built-in dimensions (HxWxD)
4.3 x 56.0 x 49.0 cm

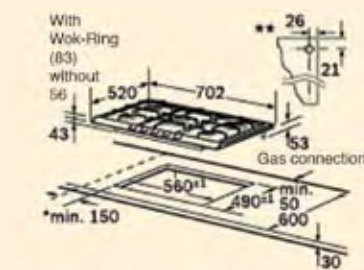

*Minimum distance from edge of hob to wall 150 mm
**Position of gas connection in cut out



Gas Hob, 60 cm

PCD655FEU - s/steel

- 1 high speed, 2 standard, 1 economy burner
- One-hand ignition
- Thermoelectric safety device
- Cast iron pan rests
- Stainless steel-effect fixed controls
- Preset of natural gas: 20 mbar
- Liquid gas jets supplied: 28-30/37 mbar
- Minimum worktop thickness: 3 cm

Accessories


- HEZ29810 (Small pot support)

Connection and Consumption Rating

- Total connection load (gas): 7.4 kW
- Total connection load (electric): 0.0006 kW
- Nominal voltage: 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1 m

Dimensions

- Appliance dimensions (HxWxD)
5.6 x 58.2 x 52.0 cm
- Built-in dimensions (HxWxD)
43.0 x 56.0 x 49.0 cm

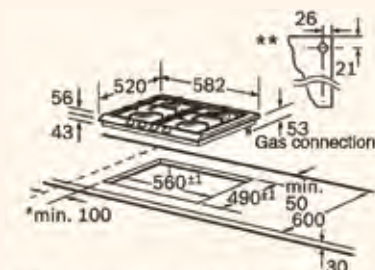

*Minimum distance from edge of hob to wall 100 mm
**Position of gas connection in cut out



Ceramic Gas Hob, 60 cm

PME675K01E - s/steel

- 1 intensive, 1 standard, 1 economy burner
- 1 radial HighSpeed cooking zone
- One-hand ignition
- Thermoelectric safety device
- Integrated spark plug and safety device
- Cast pan rests with rubber feet
- HighSpeed glass ceramic without décor
- Stainless steel front profile
- Preset of natural gas: 20 mbar
- Liquid gas jets supplied: 28-30/37 mbar
- Can be used in combination with domino modules via connection strips
- Minimum worktop thickness: 3 cm

Accessories


- Glass scraper

Connection and Consumption Rating

- Total connection load (gas): 5.8 kW
- Total connection load (electric): 1.7 kW
- Nominal voltage: 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1 m

Dimensions

- Appliance dimensions (HxWxD)
4.7 x 59.2 x 52.0 cm
- Built-in Dimensions (HxWxD)
4.5 x 56.0 x 49.0 cm



*Minimum distance from edge of hob to wall.



Gas Hob, 60 cm

NGT635RNE - s/steel

NGT612RNE - white


- 1 intensive, 2 standard, 1 economy burner
- One-hand ignition
- Thermoelectric safety device
- Integrated spark plug and safety device
- Enamelled flat steel pan rests with rubber feet
- Preset of liquid gas: 28-30/37 mbar
- Natural gas jets supplied: 20 mbar
- Minimum worktop thickness: 3 cm

Connection and Consumption Rating

- Total connection load (gas): 7.5 kW
- Total connection load (electric): 0.0001 kW
- Nominal voltage: 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1.5 m

Dimensions

- Appliance dimensions (HxWxD)
4.3 x 58.0 x 51.0 cm
- Built-in dimensions (HxWxD)
3.3 x 56.0 x 49.0 cm

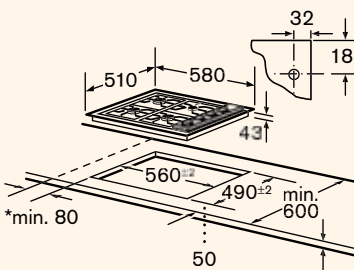

*Minimum distance from edge of hob to wall 80 mm.



Gas Hob, 60 cm

NGT635TNE - s/steel

NGT612TNE - white


- 1 intensive, 2 standard, 1 economy burner
- One-hand ignition
- Integrated spark plug
- Enamelled flat steel pan rests with rubber feet
- Preset of liquid gas: 28-30/37 mbar
- Natural gas jets supplied: 20 mbar
- Minimum worktop thickness: 3 cm

Connection and Consumption Rating

- Total connection load (gas): 7.5 kW
- Total connection load (electric): 0.0001 kW
- Nominal voltage: 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1.5 m

Dimensions

- Appliance dimensions (HxWxD)
4.3 x 58.0 x 51.0 cm
- Built-in dimensions (HxWxD)
3.3 x 56.0 x 49.0 cm

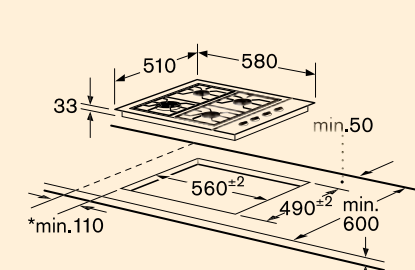

*Minimum distance from edge of hob to wall.



Gas Hob, 60 cm

NMT635TNE - s/steel


- 1 intensive, 1 standard, 1 economy burner
- One-hand ignition
- Integrated spark plug
- Enamelled flat steel pan rests with rubber feet
- Fast heat hotplate
- Preset of liquid gas: 28-30/37 mbar
- Natural gas jets supplied: 20 mbar
- Minimum worktop thickness: 3 cm

Connection and Consumption Rating

- Total connection load (gas): 5.75 kW
- Total connection load (electric): 1 kW
- Nominal voltage: 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1.5 m

Dimensions

- Appliance dimensions (HxWxD)
4.3 x 58.0 x 51.0 cm
- Built-in dimensions (HxWxD)
3.3 x 56.0 x 49.0 cm

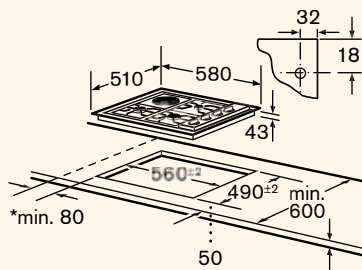

*Minimum distance from edge of hob to wall 80 mm.

Domino Modules

Domino Modules

Glass Ceramic

Glass Ceramic

Gas Dominos



30 cm

Ceramic Gas Hob, 30 cm

PGE375K03P - s/steel

- 1 intensive and 1 standard burner
- One-hand ignition
- Thermoelectric safety device
- Integrated spark plug and safety device
- Cast pan rests with rubber feet
- HighSpeed glass ceramic without décor
- Stainless steel front profile
- Preset of liquid gas: 28-30/37 mbar
- Natural gas jets supplied: 20 mbar
- Can be used in combination with 30, 60, 80, 90 cm ceramic hobs (front profile) via connection strips
- Minimum worktop thickness: 3 cm

Accessories

- 1 glass scraper

Optional Accessories


- HZZ394300 (connecting strip)
- HZZ298101 (small pot support)

Connection and Consumption Rating

- Total connection load (gas): 4.7 kW
- Nominal voltage: 220 - 240 V
- Frequency: 50 Hz
- Length of connecting cable: 1 m

Dimensions

- Appliance dimensions (HxWxD)
4.5 x 28.9 x 52.0 cm
- Built-in dimensions (HxWxD)
4.3 x 27.0 x 49.0 cm



*Minimum 100
**Minimum distance from the edge of hob to wall 100 mm



30 cm

Ceramic Gas Hob, 30 cm

PGF375K03P - s/steel

- 1 dual circuit WOK burner
- One-hand ignition
- Thermoelectric safety device
- Integrated spark plug and safety device
- Cast pan rests with rubber feet
- HighSpeed glass ceramic without décor
- Stainless steel front profile
- Preset of liquid gas: 28-30/37 mbar
- Natural gas jets supplied: 20 mbar
- Can be used in combination with 30, 60, 80, 90 cm ceramic hobs (front profile) via connection strips
- Minimum worktop thickness: 3 cm

Accessories

- WOK ring
- 1 glass scraper

Optional Accessories


- HEZ304300 (connection strip)

Connection and Consumption Rating

- Total connection load (gas): 5.6 kW
- Nominal voltage: 220 - 240 V
- Frequency: 50 Hz
- Length of connecting cable: 1 m

Dimensions

- Appliance dimensions (HxWxD)
5.5 x 28.9 x 52.0 cm
- Built-in dimensions (HxWxD)
4.3 x 27.0 x 49.0 cm



*Minimum 100
**Minimum distance from the edge of hob to wall 100 mm



30 cm

Gas Hob, 30 cm

PCD345D - s/steel

- 1 intensive, 1 economy burner
- One-hand ignition
- Thermoelectric safety device
- Integrated spark plug and safety device
- Enamelled flat steel pan rests with rubber feet
- Preset of natural gas: 20 mbar
- Liquid gas jets supplied: 28-30/37 mbar
- Minimum worktop thickness: 3 cm

Optional Accessories


- NEZ34VLA (connection strip for 2 domino modules)
- NEZ34VLB (connection strip for domino module/glass ceramic hob)

Connection and Consumption Rating

- Total connection load (gas): 4 kW
- Nominal voltage: 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1 m

Dimensions

- Appliance dimensions (HxWxD)
5.2 x 28.8 x 50.5 cm
- Built-in dimensions (HxWxD)
4.2 x 26.8 x 49.0 cm



*Minimum 100
**Minimum distance from the edge of hob to wall 100 mm



30 cm

Gas Hob, 30 cm

PCH345D - s/steel

- 1 triple-circuit WOK burner
- One-hand ignition
- Thermoelectric safety device
- Integrated spark plug and safety device
- Enamelled flat steel pan rests with rubber feet
- Preset of natural gas: 20 mbar
- Liquid gas jets supplied: 28-30/37 mbar
- Minimum worktop thickness: 3 cm

Accessories

- WOK attachment ring

Optional Accessories


- NEZ34VLA (connection strip for 2 domino modules)
- NEZ34VLB (connection strip for domino module / glass ceramic hob)

Connection and Consumption Rating

- Total connection load (gas): 3.6 kW
- Nominal voltage: 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1 m

Dimensions

- Appliance dimensions (HxWxD)
5.2 x 28.8 x 50.5 cm
- Built-in dimensions (HxWxD)
4.2 x 26.8 x 49.0 cm



*Minimum 100
**Minimum distance from the edge of hob to wall 100 mm




Practical and stylish, a **Bosch** hood can be the focal point of your kitchen or discreetly built into a kitchen unit.

If you can't take the heat or the smell, don't get out of the kitchen - switch on the hood. A Bosch hood ensures that any unwanted smells are whisked away and neutralized at the touch of a button. Depending on the look you're after, the hood can become the focal point of your kitchen or it can be discreetly built into a cupboard. For those really tight on space, a conventional extractor hood, which tucks neatly underneath a kitchen unit could provide the ideal space-saving solution.

Most Bosch hoods have integrated lights, which not only provide a useful source of additional illumination but create a point of impact around your hob. For extra convenience, the Bosch metal grease filter, which comes standard in most hoods, is dishwasher safe. Whichever type is for you, a Bosch hood adds a professional finishing touch to your kitchen.

Hoods - Features and benefits

Island Canopy Hoods




Give the finishing touch to kitchens with a hob built over a central island. Designed for ceiling installation, the hood is independent of surrounding fixtures, making it a focal point and a real style statement.

Canopy Hoods



Are installed between the wall cupboards above the hob and fixed to the wall.

Built-Under Hoods



Are either fitted below an appropriate wall cupboard or mounted separately on the wall.

Convenience



The writing and stripes on the **fleece grease filter** darken considerably when this filter is saturated to indicate when it needs to be replaced.

A **metal grease filter** provides the ultimate in filtering efficiency. In contrast to a **fleece grease filter**, which must be replaced once saturated, a metal grease filter is a permanent solution: as soon as its capacity is reached, simply wash it out or pop it in the dishwasher. It is then immediately ready for use again.

Electronic Saturation Indicator

A component in the casing counts the hours in operation. After 30-40 hours an 'S' will appear in the display showing that the metal grease filter has to be washed. If you use an active carbon filter (Re-circulation mode), a 'C' will appear in the display.

Considerable build-up of vapours may be quickly eliminated via the **intensive setting**. This top speed is usually only necessary for a few minutes – which is why the intensive setting is automatically reset after 10 minutes.

Cooking odours often remain in the kitchen, even after the meal is prepared. **The automatic fan follow-up** assures that even these remaining odours are eliminated. The kitchen is automatically aired for a further 10 minutes – then the cooker hood switches itself off.

Automatic Reset

When the intensive setting is selected, it may be set to automatically revert to a pre-defined normal setting after a short period of time.

The **interval switch** activates the kitchen ventilator for five minutes on the lowest setting, keeping the air in your kitchen fresh and pleasant.

Worktop Lighting

Integral lighting ensures there is plenty of light available in the cooking area. Thanks to the **dimmer function**, you can set the brightness of the hood to provide atmospheric lighting in the kitchen whilst entertaining.

When the **SoftLight** is switched on, it does not shine at its maximum strength straight away, but gradually brightens in a short space of time. Similarly, when you switch the light off, the light gradually fades away.

Hoods - Features and benefits

Professionalism

The wide range of equipment with different fan performance ratings ensure that the right hood is available for every application. Ideal for hobby cooks or professionals. Perfect for kitchens of every size.

Exhaust Air Mode



The most efficient method of purifying the kitchen air is to vent the vapours directly to the outside via a discharge line. Fresh air flows in as a result of the bottom pressure produced.

In hoods with external fan units, the fan is separate from the suction unit. External fans are installed outside the kitchen, which significantly reduces noise in the kitchen. They are especially suited for use in large kitchens, due to their high air-flow ratings. The fan can be mounted internally, on the outside wall or under the roof.

Re-circulation Mode

If an outside wall cannot be reached the extractor can be set up for Re-circulation. Air is drawn into the appliance and scrubbed clean via the grease and active carbon filters. Then the filtered air is released back into the kitchen.













The **starter set for Re-circulation mode** contains all that is required, e.g. active carbon filter, flow guide and the connection hose between the cooker hood and flow guide, as well as the securing components.

Please Note

The distance between electric hobs and flat pull-out hoods should be a min. of 43 cm and 65 cm on all other models. Clearance over the gas hobs should always be 65 cm and even 75 cm for some models.

Hoods

Hoods

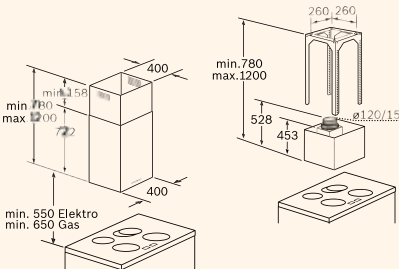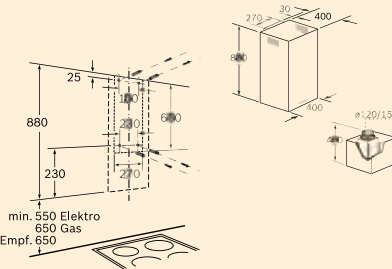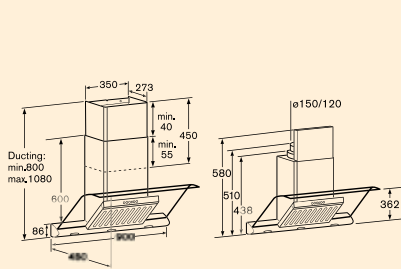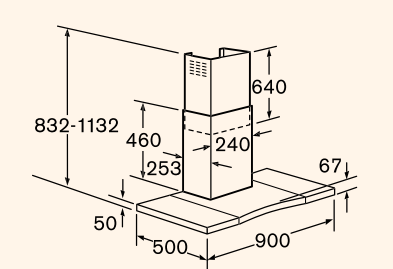Island Chimney Hood	Chimney Hoods Cube design	Chimney Hoods Extendable Depth	Soft Light and Dimmer Function		
					
Island Chimney Hood, 100 cm	Ceiling Chimney Hood, 40 cm	Ceiling Chimney Hood, 40 cm	Wall-mounted Chimney Hood, 90 cm	Wall-mounted Chimney Hood, 90 cm	Wall-mounted Chimney Hood, 90 cm
DIE165R - s/steel	DIE475E - s/steel	DKE475E	DKE985F - s/steel	DKE995F - s/steel	DKE975F - s/steel
<ul style="list-style-type: none">For ceiling mounting above cooking islandOptional exhaust air or re-circulation modeGlass visor with metal profile and integrated control unitOperation from both sides possibleMetal grease filter with multi-zone venting, dishwasher safeSaturation display for metal grease filter and active carbon filter (only re-circulation)Worktop lighting: 4x20 W halogen bulbsElectronic controls with 7-segment electronic read-outSoftLightDimming functionDual high speed fan3 speed and 1 intensive setting with automatic reset facilityMaximum extraction rate: 720 m³/hr <ul style="list-style-type: none">Min. distance to gas hob: 65 cmMin. distance to electric hob: 55 cm <ul style="list-style-type: none">Active carbon filter: ID 351210 <p>Optional Accessories</p> <ul style="list-style-type: none">DDZ10MK (telescopic wall box for exhaust air)DDZ12MK (telescopic wall box for air intake and exhaust air)DH25305 (starter set for re-circulation mode including active carbon filter) <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">Total connected load: 295 WNominal voltage: 220 - 230 VFrequency: 50 HzLength of connecting cable: 1.3 m <p>Dimensions</p> <ul style="list-style-type: none">Exhaust air (HxWxD) 77.2 - 105.2 x 100.0 x 70.0 cmRe-circulation (HxWxD) 77.2 - 109.2 x 100.0 x 70.0 cm	<ul style="list-style-type: none">40cm Island Chimney Hood. Cube design. Stainless steelIsland Hood / Ceiling mounted hoodSuitable for ducted or re-circulated extractionDishwasher-safe metal grease filter2 x 20 W halogen lightsElectronic controls with a 7-segment electronic readoutAutomatic reset facilityAutomatic 10-minute run-on facilityMaximum extraction rate 750 m3/hSaturation indicator for filterSound level according to DIN/EN 60704-2-13: 61 dB (re1pW) on max. Normal 430 m3/h <p>Optional Accessories</p> <ul style="list-style-type: none">DH25445 - Sarter set <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">Total connection load: 340 WNominal voltage: 220-240 VFrequency: 50 Hz <p>Dimensions:</p> <ul style="list-style-type: none">Appliance dimensions (HxWxD) 780 - 1200 x 400 x 400 mm	<ul style="list-style-type: none">Wall mounted hoodSuitable for ducted or re-circulated extractionMetal grease filter, dishwasher safe2 x 20 W halogen lightsElectronic controls with a 7-segment electronic readoutAutomatic revertAutomatic 10 minutes after runningMaximum extraction rate 760 m³/hSaturation indicator for filterSound level according to DIN/EN 60704-2-13: 60 dB (re1pW) on max. Normal 440 m³/h <p>Optional Accessories</p> <ul style="list-style-type: none">DH25435: Starter Set <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">Total connection load: 340 WNominal voltage: 220-240 VFrequency: 50 Hz <p>Dimensions</p> <ul style="list-style-type: none">Appliance dimensions (HxWxD) 880 x 400 x 400 mm	<ul style="list-style-type: none">For wall-mounting above hobOptional exhaust air or Re-circulation modeMetal grease filter, dishwasher safeSaturation display for metal grease and active carbon filtersWorktop lighting: 2x20 W halogen bulbsExtendable depth from 43-65 cmTouchControl with digital display3 power and 1 intensive settingsAutomatic on/off when operating the pull-out or through main switchAutomatic 10-minute run-on facilityMaximum extraction rate: 700 m³/hr <ul style="list-style-type: none">Min. distance to gas hob: 65 cmMin. distance to electric hob: 55 cm <ul style="list-style-type: none">Active carbon filter: ID 351210 <p>Optional Accessories</p> <ul style="list-style-type: none">DH25165 (starter set for re-circulation mode including active carbon filter)DDZ10MK (telescopic wall box for exhaust air)DDZ12MK (telescopic wall box for air intake and exhaust air) <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">Total connected load: 295 W <p>Dimensions</p> <ul style="list-style-type: none">Exhaust air (HxWxD) 67.8 - 108.3 x 90.0 x 43.0 cmRe-circulation (HxWxD) 75.3 - 116.8 x 90.0 x 43.0 cm	<ul style="list-style-type: none">For wall-mounting above hobDucted extraction onlyMetal grease filter, dishwasher safeSaturation display for metal grease filterWorktop lighting: 3x20 W halogen bulbsSoftLightDimming functionElectronic control with 7-segment electronic read-outIntensive setting with automatic reset facilityAutomatic 10-minute run-on facilityMaximum extraction rate: 620 m³/hr <ul style="list-style-type: none">Min. distance to gas hob: 65 cmMin. distance to electric hob: 55 cm <p>Optional Accessories</p> <ul style="list-style-type: none">DDZ10MK (telescopic wall box for exhaust air)DDZ12MK (telescopic wall box for air intake and exhaust air) <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">Total connected load: 220 WNominal voltage: 220 - 230 VFrequency: 50 HzLength of connecting cable: 1.3 m <p>Dimensions</p> <ul style="list-style-type: none">Exhaust air (HxWxD) 80.0 - 108.0 x 90.0 x 48.0 cm	<ul style="list-style-type: none">For wall-mounting above hobOptional exhaust air or Re-circulation modeMetal grease filter, dishwasher safeSaturation display for metal grease and active carbon filtersElectronic touch keysWorktop lighting: 4x20 W halogen bulbs3 power and 1 intensive settingsDual high speed fanMaximum extraction rate: 560 m³/hr <ul style="list-style-type: none">Min. distance to gas hob: 75 cmMin. distance to electric hob: 65 cm <ul style="list-style-type: none">Active carbon filter: ID 431706 <p>Optional Accessories</p> <ul style="list-style-type: none">DH25175 (starter set for re-circulation mode including active carbon filter)DDZ10MK (telescopic wall box for exhaust air)DDZ12MK (telescopic wall box for air intake and exhaust air) <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">Total connected load: 240 WNominal voltage: 220 - 230 VFrequency: 50 HzLength of connecting cable: 1.3 m <p>Dimensions</p> <ul style="list-style-type: none">Exhaust air (HxWxD) 83.2 - 113.2 x 90.0 x 50.0 cmRe-circulation (HxWxD) 83.2 - 113.2 x 90.0 x 50.0 cm
					

Hoods

Hoods

SoftLight and Dimmer Function



Wall-mounted Chimney Hood, 90 cm

DKE965R - s/steel

- 90cm wall-mounted Chimney Hood with glass canopy. Stainless steel
- Wall mounted hood
- Suitable for ducted or re-circulated extraction
- Glass canopy
- Dishwasher-safe metal grease filter with multi zone extraction
- 2 x 20 W halogen lights
- Electronic controls with a 7-segment electronic readout
- 3 speeds plus intensive setting
- Automatic reset facility
- Maximum extraction rate 550 ml/h
- Sound level according to DIN/EN 60704-2-13: 58 dB (re1pW) on max. Normal 400 ml/h

Optional Accessories


- DHZ5185- Recirculating Kit

Connection and Consumption Rating

- Total connection load: 240 W
- Nominal voltage: 220-240 V
- Frequency: 50 Hz
- Length of connecting cable: 1.3 m

Dimensions

- Appliance dimensions (HxWxD)
808 - 1190 x 900 x 520 mm



Wall-mounted Chimney Hood, 90 cm

DKE995E - s/steel

- For wall-mounting above hob
- Optional exhaust air or Re-circulation mode
- Glass visor
- Metal grease filter with multi-zone venting, dishwasher safe
- Saturation display for metal grease filter and active carbon filter (only Re-circulation mode)
- Worktop lighting: 2x20 W with 2 halogen lamps
- SoftLight
- Dimming function
- Electronic control via touch keys with digital display
- 3 power and 1 intensive setting
- Dual high speed fan
- Intensive setting with automatic reset facility
- Automatic 10-minute run-on facility
- Maximum extraction rate: 590 m³/hr

- Min. distance to gas hob: 65 cm
- Min. distance to electric hob: 55 cm

- Active carbon filter: ID 431706

Optional Accessories


- DHZ5185 (starter set for Re-circulation mode including active carbon filter)
- DDZ10MK (telescopic wall box for exhaust air)
- DDZ12MK (telescopic wall box for air intake and exhaust air)

Connection and Consumption Rating

- Total connected load: 240 W
- Nominal voltage: 220 - 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1.3 m

Dimensions

- Exhaust air (HxWxD)
70.5 - 110.0 x 90.0 x 50.0 cm
- Re-circulation (HxWxD)
74.0 - 117.0 x 90.0 x 50.0 cm



Wall-mounted Chimney Hood, 90 cm

DKE965P - s/steel

- For wall-mounting above hob
- Optional exhaust air or Re-circulation mode
- Glass visor with metal profile
- Metal grease filter with multi-zone venting, dishwasher safe
- Worktop lighting: 2x20W halogen bulbs
- Electronic touch keys with digital display
- 3 power and 1 intensive setting
- Dual high speed fan
- Maximum extraction rate: 550 m³/hr

- Min. distance to gas hob: 65 cm
- Min. distance to electric hob: 55 cm

- Active carbon filter: ID 360732

Optional Accessories


- DHZ5185 (starter set for re-circulation mode including active carbon filter)
- DDZ10MK (telescopic wall box for exhaust air)
- DDZ12MK (telescopic wall box for air intake and exhaust air)

Connection and Consumption Rating

- Total connected load: 240 W
- Nominal voltage: 220 - 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1.3 m

Dimensions

- Exhaust air (HxWxD)
71.5 - 110.0 x 90.0 x 52.0 cm
- Re-circulation (HxWxD)
80.8 - 119.0 x 90.0 x 52.0 cm

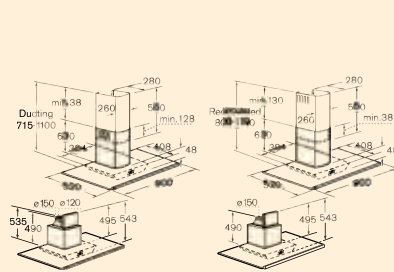

Wall-mounted Chimney Hood, 90 cm

DKE945G - s/steel

- For wall-mounting above hob
- Optional exhaust air or re-circulation mode
- Metal grease filter, dishwasher safe
- Worktop lighting: 3x20 W halogen bulbs
- Electronic controls within 7-segment electronic read-out
- 3 power settings
- Intensive setting with automatic reset facility
- Maximum extraction rate: 740 m³/h

- Min. distance to gas hob: 65 cm
- Min. distance to electric hob: 55 cm

Optional Accessories


- DDZ10MK (telescopic wall box for exhaust air)
- DDZ12MK (telescopic wall box for air intake and exhaust air)
- DHZ5185 (re-circulating kit)
- DHZ9550 (brushed steel back panel)

Connection and Consumption Rating

- Total connected load: 310 W
- Nominal voltage: 220 - 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1.3 m

Dimensions

- Exhaust air (HxWxD)
68.4 - 108.3 x 90.0 x 50.0 cm
- Re-circulation (HxWxD)
77.5 - 117.9 x 90.0 x 50.0 cm



Wall-mounted Chimney Hood, 90 cm

DKE935A - s/steel

DKE932A - white not shown

- For wall-mounting above hob
- Optional exhaust air or re-circulation mode
- Metal grease filter, dishwasher safe
- Worktop lighting: 2x40 W halogen bulbs
- Dual high speed fan
- 3 power settings
- Maximum extraction rate
400 m³/hr in exhaust air mode

- Min. distance to gas hob: 65 cm
- Min. distance to electric hob: 55 cm

- Active carbon filter: ID 351210

Optional Accessories


- DHZ10MK (starter set for re-circulation mode including active carbon filter)
- DDZ10MK (telescopic wall box for exhaust air)
- DDZ12MK (telescopic wall box for air intake and exhaust air)
- DHZ9055 (chrome finished wire shelf and wall brackets, (WxD)= 89.5 x 35.5 cm)
- DHZ9055 (back panel, stainless steel, (WxD)= 90.0 x 65.0 cm)

Connection and Consumption Rating

- Total connected load: 260 W
- Nominal voltage: 220 - 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1.3 m

Dimensions

- Exhaust air (HxWxD)
79.3 - 108.0 x 90.0 x 50.0 cm
- Re-circulation (HxWxD)
81.3 - 108.0 x 90.0 x 50.0 cm



Wall-mounted Chimney Hood, 60 cm

DKE645M - s/steel

- For wall-mounting above hob
- Optional exhaust air or re-circulation mode
- Metal grease filter, dishwasher safe
- Worktop lighting: 2x20 W halogen bulbs
- Electronic controls with 7-segment electronic read-out
- 3 power settings
- Maximum extraction: 400 m³/h

- Min. distance to gas hob: 65 cm
- Min. distance to electric hob: 55 cm

- Active carbon filter: ID 360732

Optional Accessories


- DHZ5145 (re-circulating kit)
- DDZ12MK (telescopic wall box re-circulation and exhaust air)
- DDZ10MK (telescopic wall box for exhaust air operation)

Connection and Consumption Rating

- Total connected load: 220 W
- Nominal voltage: 220 - 230 V
- Frequency: 50 Hz
- Length of connecting cable: 1.2 m

Dimensions

- Exhaust air (HxWxD)
793.0 - 1080.0 x 60.0 x 50.0 cm
- Re-circulation (HxWxD)
813.0 - 1080.0 x 60.0 x 50.0 cm

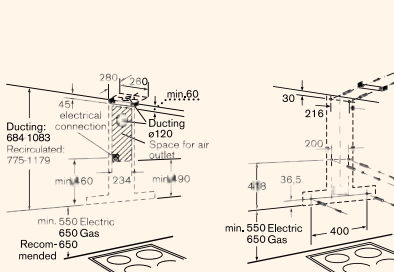

Hoods

Built-under Hoods

90
cm



Built-under Hood, 90 cm

DHU932UEU - white

- Optional exhaust air or re-circulation mode
- Metal grease filter, dishwasher safe
- Infinitely adjustable glass visor
- Worktop lighting: 2x40 W bulbs
- Twin motor
- Maximum venting capacity: 380 m³/hr
- 3 power settings, 1 intensive setting

- Min. distance to gas hob: 65 cm
- Min. distance to electric hob: 65 cm

Optional Accessories


- DHZ1100 (active carbon filter for re-circulation mode)
- DDZ10MK (telescopic wall box for exhaust air)
- DD12MK (telescopic wall box for air intake/exhaust air)

Connection and Consumption Rating

- Total connected load: 340 W
- Nominal voltage: 220 - 240 V
- Frequency: 50 Hz
- Length of connecting cable: 1.3 m

Dimensions

- Exhaust air (HxWxD)
14.0 x 89.8 x 51.0 cm
- Re-circulation (HxWxD)
14.0 x 89.8 x 51.0 cm

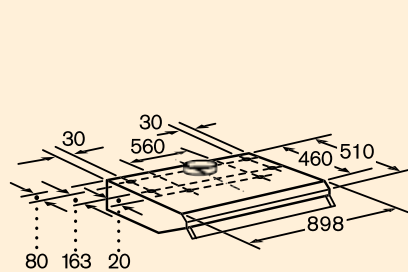

90
cm



Built-under Hood, 90 cm

DHU935HME - s/steel

- Optional exhaust air or re-circulation mode
- Metal grease filter, dishwasher safe
- Active carbon filter for re-circulation mode
- Worktop lighting: 2x40 W bulbs
- Maximum venting capacity: 420 m³/hr
- 3 power settings

- Min. distance to gas hob: 65 cm
- Min. distance to electric hob: 65 cm

Optional Accessories


- DDZ10MK (telescopic wall box for exhaust air)
- DDZ12MK (telescopic wall box for air intake/exhaust air)

Connection and Consumption Rating

- Total connected load: 240 W
- Nominal voltage: 220 - 240 V
- Frequency: 50 Hz
- Length of connecting cable: 1.5 m

Dimensions

- Exhaust air (HxWxD)
13.5 x 90.0 x 49.5 cm
- Re-circulation (HxWxD)
13.5 x 90.0 x 49.5 cm



90
cm



Built-under Hood, 90 cm

DHU932GME - white

- Optional exhaust air or re-circulation mode
- Fleece grease filter with saturation filter
- Active carbon filter for re-circulation mode
- Worktop lighting: 2x40 W bulbs
- Maximum venting capacity: 285 m³/hr

- Min. distance to gas hob: 65 cm
- Min. distance to electric hob: 65 cm


- Active carbon filter: ID 366302

Connection and Consumption Rating

- Total connected load: 210 W
- Nominal voltage: 220 V
- Frequency: 50Hz - 60Hz
- Length of connecting cable: 1.5 m

Dimensions

- Exhaust air (HxWxD)
13.5 x 90.0 x 49.5 cm
- Re-circulation (HxWxD)
13.5 x 90.0 x 49.5 cm



60
cm



Built-under Hood, 60 cm

DHU635GZA - s/steel

- Optional exhaust air or re-circulation mode
- Metal grease filter
- Active carbon filter for re-circulation mode
- Worktop lighting: 2x40 W bulbs
- Maximum venting capacity: 420 m³/hr
- 3 power settings

- Min. distance to gas hob: 65 cm
- Min. distance to electric hob: 65 cm

- Active carbon filter: ID 187982

Optional Accessories


- DDZ10MK (telescopic wall box for exhaust air)
- DDZ12MK (telescopic wall box for air intake and exhaust air)

Connection and Consumption Rating

- Total connected load: 340 W
- Nominal voltage: 230 - 240 V
- Frequency: 50 Hz
- Length of connecting cable: 1.3 m

Dimensions

- Exhaust air (HxWxD)
13.5 x 60.0 x 49.5 cm
- Re-circulation (HxWxD)
13.5 x 60.0 x 49.5 cm



60
cm



Built-under Hood, 60 cm

DHU625P - s/steel

- Optional exhaust air or Re-circulation mode
- Fleece grease filter with saturation display
- Adjustable glass visor
- Twin motor
- Maximum venting capacity in exhaust mode: 180 m³/hr
- Worktop lighting: 1x40 W bulb

- Min. distance to gas hob: 65 cm
- Min. distance to electric hob: 65 cm

Optional Accessories


- DHZ110 (active carbon filter for Re-circulation mode)
- DHZ1610 (metal grease filter)
- DHZ2100 (pattern for fleece grease filter)
- DDZ10MK (telescopic wall box for exhaust air)
- DDZ12MK (telescopic wall box for air intake and exhaust air)

Connection and Consumption Rating

- Total connected load: 130 W
- Nominal voltage: 220 - 240 V
- Frequency: 50 Hz
- Length of connecting cable: 1.3 m

Dimensions

- Exhaust air (HxWxD)
14.0 x 59.8 x 51.0 cm
- Re-circulation (HxWxD)
14.0 x 59.8 x 51.0 cm

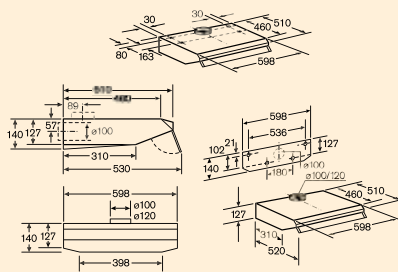

60
cm



Built-under Hood, 60 cm

DHU632GME - white

- Optional exhaust air or re-circulation mode
- Fleece grease filter
- Active carbon filter for re-circulation mode
- Worktop lighting: 2x40 W bulbs
- Maximum venting capacity: 285 m³/hr
- 3 power settings

- Min. distance to gas hob: 65 cm
- Min. distance to electric hob: 65 cm


- Active carbon filter: ID 366302

Connection and Consumption Rating

- Total connected load: 210 W
- Frequency: 50Hz - 60Hz
- Length of connecting cable: 1.5 m

Dimensions

- Exhaust air (HxWxD)
13.5 x 60.0 x 49.5 cm
- Re-circulation (HxWxD)
13.5 x 60.0 x 49.5 cm





The **Bosch** range of innovative refrigeration products pioneer in design and energy conservation.


As well as being pioneers in product design, our commitment to the environment, we were the first manufacturer to produce cooling products that are CFC and HFC free. Low energy consumption is also a priority, so our appliances not only save you money, but also minimises environmental damage. And because we put hygiene and food safety first, most of our fridges have a special antibacterial

lining to protect against micro-organism growth. State-of-the-art features such as auto defrost, super freezing and humidity control are designed to save you time and provide optimum food storage conditions. Whether you shop everyday or once a week, for yourself or for a big household, Bosch has the right cooling appliance for you.



CoolModula Refrigerators. Flexible **performance.**

Bosch CoolModula Refrigeration introduces a new concept in cooling—customization. Fully integrated, built-in refrigerators, freezers, French door and 2-door bottom-freezers and wine storage in various sizes offer the ultimate in storage capacity and flexibility. This enables you to create a perfectly customized system to fit both your kitchen and your family's needs. Advanced technologies like the MARKETFRESH food preservation system help keep your food at the peak of freshness. And like all Bosch appliances, they are designed to keep energy consumption to a minimum.

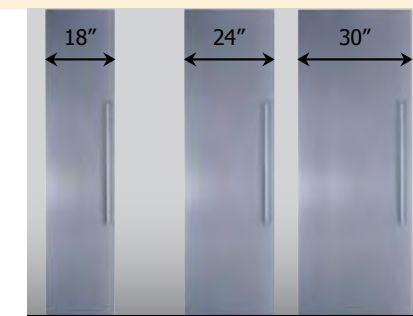

Professionalism

With Bosch CoolModula Refrigeration, you can customize your kitchen to meet your family's needs. Large families have the option to choose higher capacity units, while small families can choose a 24" refrigerator and 18" freezer for a more traditional configuration.



MARKETFRESH Food Preservation System

This integrated system helps keep all of your food at the peak of freshness. Each unit is comprised of its own compressor and evaporator, which eliminates the possibility of odor transfer between two units. Also, an additional cooling channel in the refrigerator door keeps items in the door bins just as cold as the items on the shelves. Finally, we added an adjustable, temperature-controlled drawer in which you can store perishable items to keep them fresh longer.



Energy Efficient

Every Bosch Integra refrigerator and freezer is ENERGY STAR® qualified. With efficient features, such as an alarm indicating the door is ajar, Vacation Mode and Economy Mode, Bosch can significantly reduce your energy bills.

Cool and **convenient.**

We've engineered our CoolModula Refrigeration with countless features to make life easier and your kitchen more efficient. Smart design details like Bosch's ice system and the ingenious hinge make everyday use a pleasure. In addition, the CoolModula boasts the legendary quiet operation you find in all Bosch appliances, keeping background noise to a minimum.



Silent

Bosch engineering does it again—quiet operation with maximum performance. Bosch CoolModula Refrigeration performs powerfully, and runs nearly silent so you can cook, eat and entertain in the kitchen.



Hinge

Designed to open out and away from the cabinetry, this ingenious hinge construction allows doors to be mounted flush and open to 115 degrees without touching or nicking surrounding cabinets. You also have full access to interior drawers at just a 90° door opening. Plus, Bosch hinge can support up to 220 lbs. of door weight, which gives you the flexibility to apply custom paneling.



Ice System

Dispensing ice and water is effortless with CoolModula. Its innovative ice system periodically rotates ice to prevent clumping, so you can quickly and easily access all the available ice in your freezer.




Convenient Water Dispensing System

Bosch CoolModula refrigerators feature a fold-out pitcher flap that accepts even large pitchers. And when you're entertaining, the water replenishment system helps make sure there's always plenty of filtered, ice-cold water on hand for you and your guests.



Refrigerators - Features and benefits

Integrated Refrigerators and Freezers

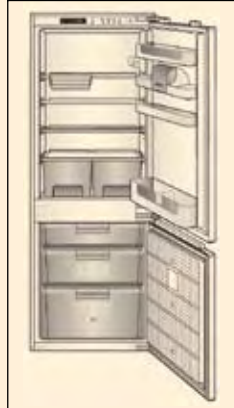


Fits in harmoniously in any kitchen as an original kitchen furniture door is fitted on the appliance door.

Refrigerators and Freezers with a Décor Frame



On these models, décor panels matching the kitchen furniture are fitted into a décor frame. This is an advantage, when a new one is replacing an old appliance. The existing décor panel can be simply re-inserted or extended if necessary by compensation panels.

Built-under Units



Are designed for installation underneath the work surface.

Safety

The **safety glass shelves** are slightly height-adjustable and especially stable, smooth and thus easy to clean. The safety glass is additionally enclosed in a surrounding plastic frame, preventing any drips in the unlikely event of something tipping over. They also have a non-slip surface, which is scratch-resistant and easy to clean.

By means of control lamps, the perfected **active warning system (optical and acoustical)** signals whether the freezer or freezer compartment is operating properly, the right temperature has been attained and whether the Super Fast Freezing function is switched on. A red control lamp and a loud alarm that cannot be overheard indicate possible malfunctions accompanied by a rise in temperature. On some electronic models the maximum temperature may be set after a malfunction.

The **optical closed-door display** offers additional security for your frozen food: a clearly visible red dot appears if the freezer door has not been closed correctly.

Magnetic seals ensure that all doors have **auto closing** and prevents cold from escaping. Additional security is provided by all integrated fridges and freezers: here, all doors even close themselves given an opening angle of less than 20%. Exception: Appliances with sliding-hinge system.

Super Cool is a function that reduces the temperature to the minimum level of 2°C at the touch of a button. This is useful, for example, when a large number of new items have just been placed in the refrigerator. It ensures that these items are not only cooled quickly, but also that items already in storage are not subjected to warming due to an excessive temperature rise.

Anti-Bacterial Protection



Most models have a natural special lining within the fridge section which gives lifetime protection against bacteria, micro-organism and algae growth, providing the safest possible storage environment for your food.

Super Fast Freezing

Quick cooling if large amounts of fresh food items should be stored. The Super Fast Freezing function sets the unit to maximum cooling capacity several hours before fresh goods are added for storage. This prevents any excessive rise in the freezer compartment temperature. If you press the Super Fast Freezing button, the refrigeration machine will work continuously. It is deactivated manually by pressing the button again or it switches off automatically when the desired temperature is reached (models with **automatic freezing**).

Refrigerators - Features and benefits

Convenience



NoFrost: No ice or frost on food and eliminates the need to defrost the appliance ever again.

Auto-defrost automatically defrosts the fridge at regular intervals without the need to switch off the appliance or remove stored food.

Dynamic Cooling

In the top section of the refrigerator a fan is placed, which switches on and off according to present temperatures in the refrigerator. This ensures uniform distribution of cold air inside the refrigerator.

The **automatic freezing** mechanism switches back to normal operation automatically once the Super Fast Freezing operation is no longer required, saving energy in the process.



Our cooling products offer among the most energy-efficient performance in the industry. This not only minimises environmental damage but also saves you money. The most efficient rating is 'A' and the least efficient is 'G'. Most of our cooling appliances have a class A **energy efficiency**.

Reduced Noise Emission

Due to optimised refrigeration technology, Bosch has succeeded in reducing noise emission by half, i.e. a noise reduction at a scarcely perceptible level!

Humidity Control



The sliding humidity control allows adjustment of both temperature and humidity levels to maximise the shelf life of fruits and vegetables. Lettuce, for example should be stored at high air humidity compared to other fruits and vegetables.

Removable Door Seals













The magnetic door seals on our refrigeration range are removable, making them easy to clean and or can be replaced if necessary.

4-star Freezer

******** Four-star freezing compartments allow frozen food to be stored at a temperature below -18°C. This means that fresh food can be frozen and stored for up to 12 months.





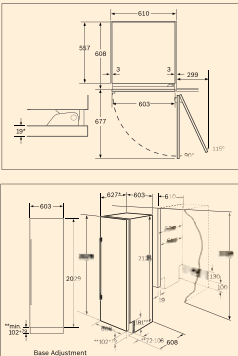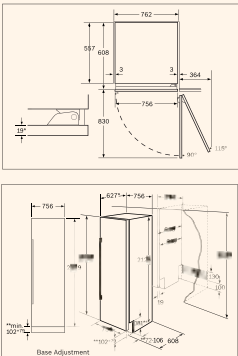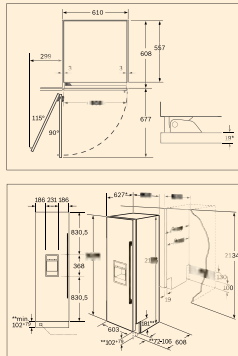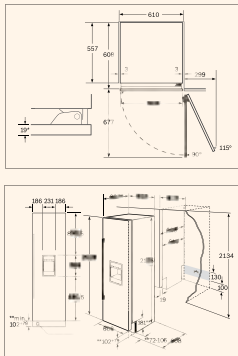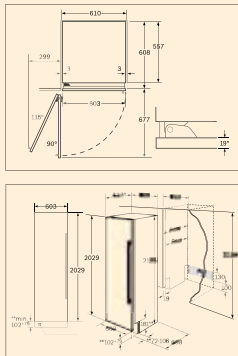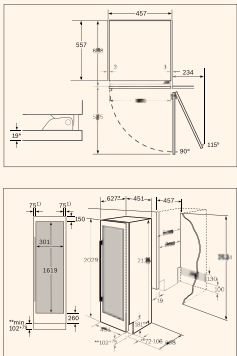







New CoolModula Refrigerators

New CoolModula Refrigerators

CoolModula Built-in Fridge	CoolModula Built-in Fridge	CoolModula Built-in Freezer	CoolModula Built-in Freezer	CoolModula Built-in Freezer	CoolModula Wine Storage Cabinet
 <div>←24"→ Energy Efficiency Rating A+</div>	 <div>←30"→ Energy Efficiency Rating A+</div>	 <div>←24"→ Energy Efficiency Rating A+</div>	 <div>←24"→ Energy Efficiency Rating A+</div>	 <div>←24"→ Energy Efficiency Rating A+</div>	 <div>←18"→ Energy Efficiency Rating A+</div>
CoolModula - Built-in Fridge	CoolModula - Built-in Fridge	CoolModula - Built-in Freezer	CoolModula - Built-in Freezer	CoolModula - Built-in Freezer	CoolModula - Wine Storage Cabinet
CIR24P00 <ul style="list-style-type: none">• Total gross capacity: 381 litres• Multi Airflow-System• AirFreshFilter• Supercool function• Automatic defrost• Climate Class SN-T• 4 safety glass shelves of which 3 are height adjustable• 1 transparent drawer on base unit on telescopic rails• 1 humidity controlled vegetable container on base unit on telescopic rails• 67 l transparent drawer with telescopic rails, additional lighting and separat tempertur controll in 0°, 1.5° and 3° C steps BOSCH FreshProtectBox• 3 extra deep door shelf, nicht vorhanden deep door shelf• Dairy compartment sealed• Halogen light• Metal Innerliner• 7 segment electronic control (Digital readout)• Language setting at the display• Eco-mode• Holiday mode• Acoustic warning system• Extremely quiet operation• Complete ventilation trough plinth• Variable plinth adaption to go from 10,2 to 18,1 cm• Door right hinged, reversible• Door aperture angle 115° Connection and Consumption Rating <ul style="list-style-type: none">• Nominal Voltage: 220 - 240 V• Mains frequency: 50 Hz• Total connected load: 266 W• Length of connecting cable: 2.0 m• Annual energy consumption: 167.54 kWh Dimensions <ul style="list-style-type: none">• Appliance dimensions (HXWxD): 212.5 x 60.3 x 60.8 cm• Niche Dimension (HxWxD): 213.4 x 61.0 x 61.0 cm	CIR30P00 <ul style="list-style-type: none">• Total gross capacity: 496 litres• Multi Airflow-System• AirFreshFilter• Supercool function• Automatic defrost• Climate Class SN-T• 4 safety glass shelves of which 3 are height adjustable• 1 transparent drawer on base unit on telescopic rails• 1 humidity controlled vegetable container on base unit on telescopic rails• 67 l transparent drawer with telescopic rails, additional lighting and separat tempertur controll in 0°, 1.5° and 3° C steps BOSCH FreshProtectBox• 1 extra deep door shelf, 2 deep door shelf• Dairy compartment sealed• Halogen light• Metal Innerliner• 7 segment electronic control (Digital readout)• Language setting at the display• Eco-mode• Holiday mode• Acoustic warning system• Extremely quiet operation• Complete ventilation trough plinth• Variable plinth adaption to go from 10,2 to 18,1 cm• Door right hinged, reversible• Door aperture angle 115° Connection and Consumption Rating <ul style="list-style-type: none">• Nominal voltage: 220 - 240 V• Mains frequency: 50 Hz• Total connected load: 311 W• Length of connecting cable: 2.0 m• Annual energy consumption: 181.41 kWh Dimensions <ul style="list-style-type: none">• Appliance dimensions (HxWxD): 212.5 x 75.6 x 60.8 cm• Niche Dimension (HxWxD): 213.4 x 76.2 x 61.0 cm	FID24P30 <ul style="list-style-type: none">• Total gross capacity: 320 litres• NoFrost• Multi Airflow-System• Super freezing with automatic switch off• Climate Class SN-T• Illuminated water and ice / crushed ice dispenser• Fixed water connection with hose 3m, 3/4"• Two separate temperature zones, both continuously variable from 5°C to 18°C and one Airfreshfilter per zone.• Metall Innerliner• 7 segment electronic control (Digital readout)• Language setting at the display• Extremely quiet operation• Eco-mode• Holiday mode• Acoustic warning system• Complete ventilation trough plinth• Variable plinth adaption to go from 10,2 to 18,1 cm• Door left hinged• Door aperture angle 115° Connection and Consumption Rating <ul style="list-style-type: none">• Nominal Voltage: 220 - 240 V• Mains frequency: 50 Hz• Total connected load: 592 W• Length of connecting cable: 2.0 m• Annual energy consumption: 383.25 kWh Dimensions <ul style="list-style-type: none">• Appliance dimensions (HxWxD): 212.5 x 60.3.6 x 60.8 cm• Niche Dimension (HxWxD): 213.4 x 61.0 x 61.0 cm	FID24P00 <ul style="list-style-type: none">• Total gross capacity: 320 litres• NoFrost• Multi Airflow-System• Super freezing with automatic switch off• Climate Class SN-T• Illuminated water and ice / crushed ice dispenser• Fixed water connection with hose 3m, 3/4"• Two separate temperature zones, both continuously variable from 5°C to 18°C and one Airfreshfilter per zone.• Metall Innerliner• 7 segment electronic control (Digital readout)• Language setting at the display• Extremely quiet operation• Eco-mode• Holiday mode• Acoustic warning system• Complete ventilation trough plinth• Variable plinth adaption to go from 10,2 to 18,1 cm• Door right hinged• Door aperture angle 115° Connection and Consumption Rating <ul style="list-style-type: none">• Nominal Voltage: 220 - 240 V• Mains frequency: 50 Hz• Total connected load: 592 W• Length of connecting cable: 2.0 m• Annual energy consumption: 383.25 kWh Dimensions <ul style="list-style-type: none">• Appliance dimensions (HxWxD): 212.5 x 60.3.6 x 60.8 cm• Niche Dimension (HxWxD): 213.4 x 61.0 x 61.0 cm	FIN24P30 <ul style="list-style-type: none">• Total gross capacity: 340 litres• NoFrost• Multi Airflow-System• Super freezing with automatic switch off• Climate Class SN-T• Automatic ice cube maker• Ice cube output 2,5 kg / 24 h; storage container ca. 4,4, kg• Fixed water connection with hose 3m, 3/4"• 2 Metal containers on telescopic rails• 5 Door bins, therfor 1 Dairy compartment sealed• Two halogen top lights• Metal Innerliner• 7 segment electronic control (Digital readout)• Language setting at the display• Extremely quiet operation• Eco-mode• Holiday mode• Freezing capacity: 18 kg in 24 hours• Storage time in power failure: 19 Hours• Acoustic warning system• Complete ventilation trough plinth• Variable plinth adaption to go from 10,2 to 18,1 cm• Door left hinged, reversible• Door aperture angle 115° Connection and Consumption Rating <ul style="list-style-type: none">• Nominal Voltage: 220 - 240 V• Mains frequency: 50 Hz• Total connected load: 421 W• Length of connecting cable: 2.0 m• Annual energy consumption: 351.86kWh Dimensions <ul style="list-style-type: none">• Appliance dimensions (HxWxD): 212.5 x 60.3.6 x 60.8 cm• Niche Dimension (HxWxD): 213.4 x 61.0 x 61.0 cm	CIW18P00 <ul style="list-style-type: none">• Total gross capacity: 296 litres• 14 bottle shelves for 70 Euro-Fl. à 0,75 l• Two halogen top lights• Active cooling via integrated fan• Climate Class SN-T• Glass door• Metal Innerliner• 7 segment electronic control (Digital readout)• Two separate temperature zones, both continuously variable from 5°C to 18°C and activated charcoal air filter per zone.• AirFreshFilter• Language setting at the display• Eco-mode• Holiday mode• Acoustic warning system• Extremely quiet operation• Automatic defrost• Complete ventilation trough plinth• Variable plinth adaption to go from 10,2 to 18,1 cm• Door right hinged, reversible• Door aperture angle 115° Connection and Consumption Rating <ul style="list-style-type: none">• Nominal Voltage: 220 - 240 V• Mains frequency: 50 Hz• Total connected load: 121 W• Length of connecting cable: 2.0 m• Annual energy consumption: 288.35kWh Dimensions <ul style="list-style-type: none">• Appliance dimensions (HxWxD): 212.5 x 45.1 x 60.8 cm• Niche Dimension (HxWxD): 213.4 x 45.7 x 61.0 cm
					

Refrigerators

Refrigerators

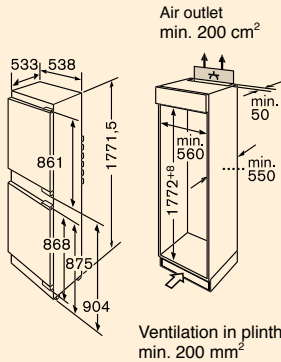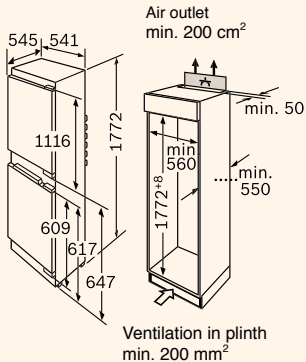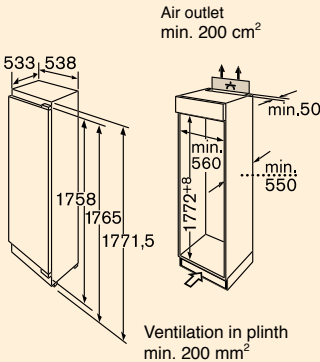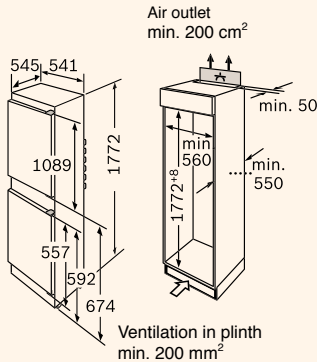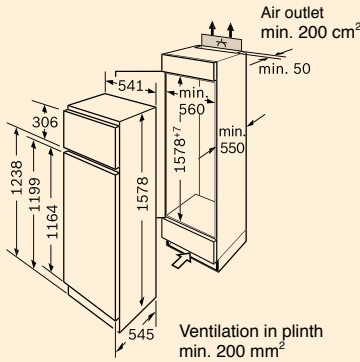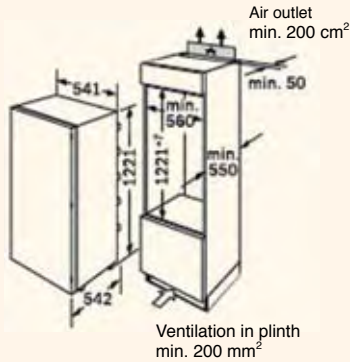Bottom Freezer	Bottom Freezer	Fridge with Freezer Compartment	Bottom Freezer	Top Freezer	Top Freezer
 <div><div>Energy Efficiency Rating A</div><div>ANTI BACTERIA</div><div>noFrost</div></div>	 <div><div>Energy Efficiency Rating B</div><div>ANTI BACTERIA</div></div>	 <div><div>Energy Efficiency Rating B</div><div>ANTI BACTERIA</div></div>	 <div><div>Energy Efficiency Rating A</div><div>ANTI BACTERIA</div><div>reddot design award winner 2007</div></div>	 <div><div>Energy Efficiency Rating A</div><div>ANTI BACTERIA</div></div>	 <div><div>Energy Efficiency Rating A</div><div>ANTI BACTERIA</div></div>
Built-in Fridge / Freezer, Bottom Freezer	Built-in/Under Fridge, Bottom Freezer	Built-in Fridge with Freezer Compartment	Built-in Fridge, Bottom Freezer	Built-in Fridge, Top Freezer	Built-in/Under Fridge
KIN32A41	KIS38A41NE	KIL38A41NE	KIV38V00	KID28VOOFF	KIR24VOO
<ul style="list-style-type: none">• Total gross capacity: 262 litres• Gross fridge capacity: 152 litres• Gross freezer capacity: 110 litres• AntiBacteria• NoFrost• 7-segment electronic control• Noise level: 44 dB• Visual and audible alarm• Active cooling via integrated fan• Fridge section: Active cooling via integrated fan, auto defrost, 4 safety glass shelves, (3 height adjustable), pull-out drawer, 2 vegetable containers with humidity control, covered dairy compartment, 25 W interior light• Freezer section: NoFrost, 4 star freezer, acoustic warning system with optical function, automatic super fast freezing, 4 transparent freezer drawers, 1 ice cube tray, freezing calendar• Storage period in power failure: 22 hrs• Freezing capacity/24 hrs: 7 kgs• Door position: right mounted, reversible <p>Accessories</p> <ul style="list-style-type: none">• 2 ice packs, 2 egg trays <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">• Nominal voltage: 220 - 240 V• Mains frequency: 50 Hz• Total connected load: 120 W• Length of connecting cable: 2.3 m• Annual energy consumption: 335.8 kWh <p>Dimensions</p> <ul style="list-style-type: none">• Appliance dimensions (HxWxD)177.2 x 53.8 x 53.3 cm• Built-in dimensions (HxWxD)178.0 x 56.2 x 55.0 cm	<ul style="list-style-type: none">• Total gross capacity: 296 litres• Gross fridge capacity: 224 litres• Gross freezer capacity: 72 litres• AntiBacteria• Noise level: 44 dB• 7-segment electronic temperature display• Visual and audible alarm• Fridge section: Auto defrost, 5 safety glass shelves (4 height adjustable), deli box, 1 vegetable container with humidity control and wavy bottom, dairy compartment, 25 W interior light• Freezer section: 4 star freezer, automatic super fast freezing, acoustic and optical warning system with memory function, 3 transparent freezer drawers, 1 ice cube tray with box, freezing calendar• Storage period in power failure: 22 hrs• Freezing capacity/24 hrs: 12 kgs• Door position: right mounted, reversible <p>Accessories</p> <ul style="list-style-type: none">• 2 ice packs• 2 egg trays <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">• Nominal voltage: 220 - 240 V• Mains frequency: 50 Hz• Total connected load: 160 W• Length of connecting cable: 2.3 m• Annual energy consumption: 445 kWh <p>Dimensions</p> <ul style="list-style-type: none">• Appliance dimensions (HxWxD)177.2 x 54.1 x 54.5 cm• Built-in dimensions (HxWxD)178 x 56.0 x 55.0 cm	<ul style="list-style-type: none">• Total gross capacity: 290 litres• Gross fridge capacity: 253 litres• Gross freezer capacity: 37 litres• AntiBacteria• Noise level: 42 dB• Fridge section: Auto defrost, 5 safety glass shelves (4 height-adjustable), deli box, 2 pull-out vegetable containers with humidity control, dairy compartment, 25 W interior light• Freezer section: Super fast freezing with automatic switch-off, 1 wire shelf, ice cube tray• Storage period in power failure: 18 hrs• Freezing capacity/24 hrs: 3 kgs• Door position: right mounted, reversible <p>Accessories</p> <ul style="list-style-type: none">• 2 egg trays <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">• Nominal voltage: 220 - 240 V• Mains frequency: 50 Hz• Total connected load: 120 W• Length of connecting cable: 2.3 m• Annual energy consumption: 335.8 kWh <p>Dimensions</p> <ul style="list-style-type: none">• Appliance dimensions (HxWxD)177.2 x 53.8 x 53.3 cm• Built-in dimensions (HxWxD)178.0 x 56.0 x 55.0 cm	<ul style="list-style-type: none">• Total gross capacity: 294 litres• Gross fridge capacity: 222 litres• Gross freezer capacity: 72 litres• AntiBacteria• Noise level: 44 dB• Fridge section: Auto defrost, 5 safety glass shelves (4 height-adjustable), 1 vegetable container with wavy bottom, interior light• Freezer section: 4-star freezer, 3 transparent freezer drawers• Storage period in power failure: 13 hrs• Freezing capacity/24 hrs: 4 kg• Door position: right-mounted, reversible <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">• Nominal voltage: 220 - 240 V• Mains frequency: 50 Hz• Total connected load: 90 W• Annual energy consumption: 317.19 kWh <p>Dimensions</p> <ul style="list-style-type: none">• Appliance dimensions (HxWxD)177.2 x 54.1 x 54.5 cm• Built-in dimensions (HxWxD)178.0 x 56.2 x 55.0 cm	<ul style="list-style-type: none">• Total gross capacity: 292 litres• Gross fridge capacity: 259 litres• Gross freezer capacity: 43 litres• AntiBacteria• Noise level: 38 dB• Mechanical temperature control• Fridge section: Auto defrost, 6 safety glass shelves (5 are height-adjustable), 1 vegetable container with wavy bottom, interior light• Freezer section: 4-star freezer, wire grid• Storage period in power failure: 18 hrs• Freezing capacity/24 hrs: 4 kg• Door position: right-mounted, reversible <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">• Nominal voltage: 220 - 240 V• Mains frequency: 50 Hz• Total connected load: 90 W• Length of connecting cable: 2.3 m• Annual energy consumption: 296.38 kWh <p>Dimensions</p> <ul style="list-style-type: none">• Appliance dimensions (HxWxD)157.8 x 54.1 x 54.5 cm• Built-in dimensions (HxWxD)158.5 x 56.0 x 55.0 cm	<ul style="list-style-type: none">• Total gross capacity: 227 litres• AntiBacteria• Noise level: 35 dB• Fridge section: Auto defrost, 6 safety glass (5 are height-adjustable), 1 vegetable container with wavy bottom, interior light• Door position: right-mounted, reversible <p>Connection and Consumption Rating</p> <ul style="list-style-type: none">• Nominal voltage: 220 - 240 V• Mains frequency: 50 Hz• Total connected load: 90 W• Length of connecting cable: 2.3 m• Annual energy consumption: 163.16 kWh <p>Dimensions</p> <ul style="list-style-type: none">• Appliance dimensions (HxWxD)122.1 x 54.1 x 54.2 cm• Built-in dimensions (HxWxD)122.8 x 56.0 x 55.0 cm
					

Refrigerators & Freezers

Refrigerators

Freestanding, Side-by-Side



Built-in/Under Fridge

KIR20V00


- Total gross capacity: 185 litres
- AntiBacteria
- Noise level: 35 dB
- Fridge section: Auto defrost, 5 safety glass shelves (4 are height-adjustable), 1 vegetable container with wavy bottom, interior light
- Door position: right-mounted, reversible

Connection and Consumption Rating

- Nominal voltage: 220 - 240 V
- Mains frequency: 50 Hz
- Total connected load: 90 W
- Length of connecting cable: 2.3 m
- Annual energy consumption: 157.32 kWh

Dimensions

- Appliance dimensions (HxWxD)
102.1 x 54.1 x 54.2 cm
- Built-in dimensions (HxWxD)
102.8 x 56.0 x 55.0 cm

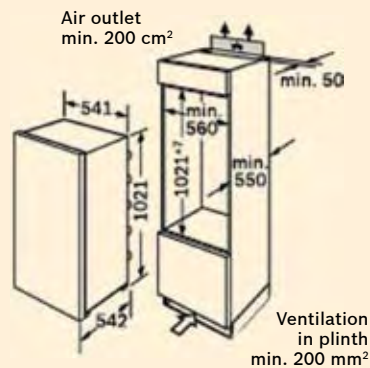

Built-in Freezer

GID18A20

- Total gross capacity: 106 litres
- Noise level: 38dB
- Visual and audible alarm
- 4-star freezer
- Fast-freeze function
- 4 transparent freezer drawers
- Freezing calendar
- Ice cube tray
- Storage period in power failure: 25 hours
- Freezing capacity in 24 hours: 12 kgs
- Door position: right-mounted, reversible

Accessories


- 2 ice packs
- 1 berry tray

Connection and Consumption Rating

- Nominal voltage: 220 - 230 V
- Mains frequency: 50 Hz
- Total connection load: 90 W
- Length of connecting cable: 2.3 m
- Annual energy consumption: 193.82 kWh

Dimensions:

- Appliance dimensions (HxWxD)
87.4 x 54.1 x 54.2 cm
- Built-in dimensions (HxWxD)
88.0 x 56.0 x 55.0 cm

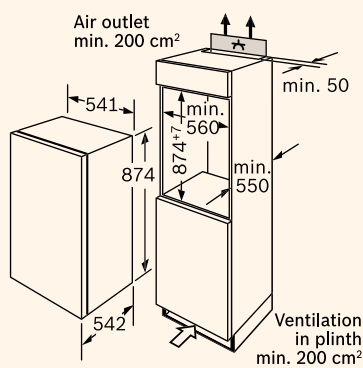

Built-in Freezer

GID14A20

- Total gross capacity: 82 litres
- Noise level: 38 dB
- Visual and audible alarm
- 4-star freezer
- Fast-freeze function
- 3 transparent freezer drawers
- Freezing calendar
- Ice cube tray
- Storage period in power failure: 20 hrs
- Freezing capacity in 24 hrs: 10 kgs
- Door position: right-mounted, reversible

Accessories


- 2 ice packs
- 1 berry tray

Connection and Consumption Rating

- Nominal voltage: 220 - 230 V
- Mains frequency: 50 Hz
- Total connected load: 90 W
- Length of connecting cable: 2.3 m
- Annual energy consumption: 193.45 kWh

Dimensions

- Appliance dimensions (HxWxD)
71.2 x 53.8 x 53.3 cm
- Built-in dimensions (HxWxD)
72.0 x 56.0 x 55.0 cm

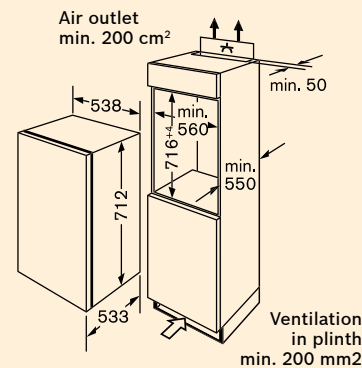

Built-in/under Fridge Komfort

KUL15A50


- Total gross capacity: 131 litres
- AntiBacteria
- Ventilation in plinth, no cut-out in the worksurface necessary
- Variable plinth adaption
- Height adjustable feet, back feet can be adjusted from front
- Automatic defrost
- 3 safety glass shelves of which 2 are height adjustable, one with slide under half shelf facility incl. one double extendable shelf above vegetable container
- 1 vegetable container
- Variable Innerdoor
- Covered dairy compartment
- 1x25W fridge light
- 4-star freezer
- Ice cube tray
- Freezing capacity: 2 kg in 24 hours
- Storage time in power failure: 12 Hours
- Door right hinged, reversible

Connection and Consumption Rating

- Nominal voltage: 220 - 240 V
- Mains frequency: 50 Hz
- Total connection load: 90 W
- Length of connecting cable: 2.3 m
- Annual energy consumption: 203 kWh

Dimensions:

- Appliance dimensions (HxWxD)
82.0 x 59.8 x 54.8 cm
- Built-in dimensions (HxWxD)
82.0 x 60.0 x 55.0 cm

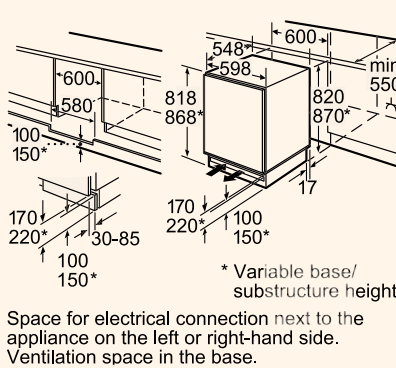

Refrigerators & Freezers

Refrigerators & Freezers



Side-by-side Fridge/Freezer

KAN58P90

- Total gross capacity: 541 litres
- SoftLine design
- Full stainless steel finish
- Separate digital electronic temperature control for fridge and freezer section
- Display control for temperature, water filter and key on
- Illuminated water and ice / crushed ice dispenser
- Door open warning tone for fridge and freezer section
- Water filter

Fridge section

- Gross fridge capacity: 357 litres
- Multi-airflow system
- Automatic defrost
- Super cool function
- 3 safety glass shelves of which 2 are height-adjustable including 1 extendable shelf
- 3 transparent drawers
- 4 door trays
- Covered dairy compartment
- 2 interior lights

Freezer section

- Gross freezer capacity: 184 litres
- NoFrost
- Fast freezing function
- 3 safety glass shelves of which 2 are height-adjustable including 1 extendable shelf
- 2 transparent freezer drawers
- 4 door trays in freezer section
- Freezer light

Accessories

- 1 connection hose
- 1 egg tray

Connection and Consumption Rating

- Nominal voltage: 220 - 240 V
- Mains frequency: 50 Hz
- Connection value: 300 W
- Energy consumption: 590 kWh/yr
- Freezing capacity in 24 hrs: 10 kgs
- Storage time in power failure: 5 hrs
- Climate class: T

Dimensions

- Appliance dimensions (HxWxD)
181.0 x 90.3 x 74.2 cm



Side-by-side Fridge/Freezer

KAN58A70NE

- Total gross capacity: 541 litres
- SoftLine design
- Door: real stainless steel
- Separate digital electronic temperature control for fridge and freezer section
- Display control for temperature, water filter and key on
- Illuminated water and ice /crushed ice dispenser
- Door open warning tone for fridge and freezer section
- Water filter

Fridge section

- Gross fridge capacity: 357 litres
- Multi-airflow system
- Automatic defrost
- Super cool function
- 3 safety glass shelves of which 2 are height-adjustable including 1 extendable shelf
- 3 transparent drawers
- 4 door trays
- Covered dairy compartment
- 2 interior lights

Freezer section

- Gross freezer capacity: 184 litres
- NoFrost
- Fast freezing function
- 3 safety glass shelves of which 2 are height-adjustable including 1 extendable shelf
- 2 transparent freezer drawers
- 4 door trays in freezer section
- Freezer light

Accessories

- 1 connection hose
- 1 egg tray

Connection and Consumption Rating

- Nominal voltage: 220 - 240 V
- Mains frequency: 50 Hz
- Connection value: 300 W
- Energy consumption: 590 kWh/yr
- Freezing capacity in 24 hrs: 10 kgs
- Storage time in power failure: 5 hrs
- Climate class: T

Dimensions

- Appliance dimensions (HxWxD)
179.0 x 90.3 x 73.3 cm



Side-by-side Fridge/Freezer

KAN60A40NE

- Total gross capacity: 541 litres
- SoftLine design
- Door: stainless steel lock, side panels grey
- Separate digital electronic temperature control for fridge and freezer section
- Display control for temperature, water filter and key on
- Illuminated water and ice / crushed ice dispenser
- Home bar
- Door open warning tone for fridge and freezer section
- Water filter

Fridge section

- Gross fridge capacity: 357 litres
- Multi-airflow system
- Automatic defrost
- Super cool function
- 3 safety glass shelves of which 2 are height-adjustable including 1 extendable shelf
- 3 transparent drawers
- 4 door trays
- Covered dairy compartment
- 2 interior lights

Freezer section

- Gross freezer capacity: 184 litres
- NoFrost
- Fast freezing function
- 3 safety glass shelves of which 2 are height-adjustable including 1 extendable shelf
- 2 transparent freezer drawers
- 4 door trays in freezer section
- Freezer light

Accessories

- 1 connection hose
- 1 egg tray

Connection and Consumption Rating

- Nominal voltage: 220 - 240 V
- Mains frequency: 50 Hz
- Connection value: 300 W
- Energy consumption: 590 kWh/yr
- Freezing capacity in 24 hrs: 10 kgs
- Storage time in power failure: 5 hrs
- Climate class: T

Dimensions

- Appliance dimensions (HxWxD)
179.0 x 90.3 x 73.3 cm



Side-by-side Fridge/Freezer

KAN60A15NE

- Total gross capacity: 536 litres
- SoftLine design
- White leather finish
- Separate digital electronic temperature control for fridge and freezer section
- Display control for temperature, water filter and key on
- Illuminated water and ice / crushed ice dispenser
- Home bar
- Door open warning tone for fridge and freezer section
- Water filter

Fridge section

- Gross fridge capacity: 352 litres
- TCD - temperature controlled drawer
- Multi-airflow system
- Automatic defrost
- Super cool function
- 3 safety glass shelves of which 2 are height-adjustable including 1 extendable shelf
- 3 transparent drawers
- 4 door trays
- Covered dairy compartment
- 2 interior lights

Freezer section

- Gross freezer capacity: 184 litres
- NoFrost
- Fast freezing function
- 3 safety glass shelves of which 2 are height-adjustable including 1 extendable shelf
- 2 transparent freezer drawers
- 4 door trays in freezer section
- Freezer light

Accessories

- 1 connection hose
- 1 egg tray

Connection and Consumption Rating

- Nominal voltage: 220 - 240 V
- Mains frequency: 50 Hz
- Connection value: 300 W
- Energy consumption: 590 kWh/yr
- Freezing capacity in 24 hrs: 10 kgs
- Storage time in power failure: 5 hrs
- Climate class: T

Dimensions

- Appliance dimensions (HxWxD)
179.0 x 90.3 x 73.3 cm



Bosch dishwashers
the world's most efficient.

Our new dishwasher generation wrings out more cleaning power from every single drop of water: using an innovative technology, unique in the world, the power of over 4000 litres of water is generated by just 10 litres of water per rinse cycle. In doing so, the ActiveWater dishwashers set whole new standards: they are the world's most efficient dishwashers – and offer an outstanding cleaning performance.

Dishwashers - Features and benefits

Fully Integrated Dishwashers



Are no longer detectable from the outside. An original kitchen furniture door is fitted on the appliance door so that the dishwasher operates without being seen.

Integrated Dishwashers



A harmonious fit for any kitchen. An original furniture door is fitted on the appliance door; all that can be seen of the dishwasher is the attractively styled control panel. Compensation stripes are again available to adjust the control panel in height to the drawer line of the remaining units.

Convenience



Best washing results with the auto 3in1 system:

Modern detergents are available today in all conceivable combinations. Which dishwashers are particularly noted for this? Quite clearly, Bosch dishwashers. For example, if you use a 3in1 tablet, the appliances register it immediately and adjust the washing process automatically – regardless whether you are using a 3in1, 2in1 or standard detergent. This feature is automatic on Bosch dishwashers only.

Noise Reduction



Our dishwashers have numerous **noise reduction devices**, which make for extremely quiet operation: 'super Silence' (40 dB), 'Silence whisper quiet' (45-47 dB), 'Silence very quiet' (48-49 dB).

Height-adjustable Top Basket



This enables more space in the lower basket to accommodate those larger items up to a plate size of 30 cm.

RackMatic™

RackMatic™ makes it easy to adjust the height of the basket even when it's fully loaded - normally a cumbersome task.

Large Item Spray Head

This unique alternative spray head fits into the connector at the back of the dishwasher oven furniture or baking trays. Simply remove the upper basket to connect the spray head (standard on all Bosch dishwashers).

VarioFlex Plus™

There are no less than 6 foldable racks in the upper basket, 4 in the lower basket and some clever small item clips in the upper basket to hold things like plastic lids and small items securely in place. Nothing needs to be left in the kitchen sink to be washed up by hand - long stemmed glasses are easily accommodated and a knife can be safely tucked away. Any extra space needed can be made by splitting the duo cutlery basket.

Foldable plate racks

Depending on the model, it is possible to fold the plate racks up and down to accommodate larger items.

Removable drawer

The basket drawers can be pulled out completely, making it that much easier to load the rear sections.



The top-dispenser for the cleaning agent means that you can refill without having to bend down.

The **servo-lock** stands for very easy handling in opening and closing the door.

VarioSpeed



Reduces programme times by 50% whilst still providing hygienic and dry dishes in only half the time! Ideal for busy households and when entertaining.

Dishwashers - Features and benefits

Auto Programme

Research shows that 50% of dishwasher users choose the wrong programme and temperature for the load and are therefore disappointed with the results. The Auto programme eliminates this by automatically selecting the correct programme time and temperature according to the soiling of the load, using HydroSensor technology.



Auto (normal) 55-65°C - perfect for a mixed load of crockery and pans.



Auto (intensive) 65-75°C - excellent for heavily soiled dishes and pans.

Half Load

If you don't have enough for a full load and can't wait, simply load the crockery, plates, pots and pans anywhere in your dishwasher, select the programme temperature and press the half load button. The programme time is reduced and 30% less water is used.



AquaSensor I controls the water consumption by checking the degree of soiling in the pre-wash water and decides whether it is clean enough to be used for the main wash cycle. Around 20% of water can be saved using the AquaSensor.



AquaSensor II is an intelligent system using two light sensors which influence the use of water, temperature and programme time duration. AquaSensor II tests the quality of water throughout the entire wash programme, allowing the accurate control of water level and programme temperature selection.

AquaSensor III



With the improved method of signal evaluation, AquaSensor III allows for greater precision during the wash cycle. Instead of a simple assessment, several levels of soiling in the water are differentiated and a larger variety of wash cycles are electronically activated.

The new **servo-lock** stands for very easy handling in opening and closing the door.

AquaVario

Varies the pressure of water from the spray arms depending on the programme you choose i.e.: if you choose Auto Delicate, the water pressure is lower and the arms move more slowly, providing peace of mind that your fragile bone china or fine crystal is protected whilst still guaranteeing an 'A' quality wash. Whereas with Auto Intensive more pressure and higher temperatures tackle heavily soiled items.

Based on the load, the **LoadSensor** calculates the amount of water in use in the dishwasher and adjusts accordingly.



5 spray levels with curved spray arms: Curved spray arms perform superb results due to the high-pressure water jets that do not get in each other's way, making sure that every nook and cranny of the dishwasher interior is showered. The water jets directly impact dish surface at 5 spraying levels.



VarioDrawer

14 full place settings have space in the ActiveWater dishwashers with VarioDrawer. Or, put into figures: 14 dinner, soup and dessert plates, 14 cups and saucers, 14 glasses and 14 cutlery settings – knife, fork, soup, tea and dessert spoons, plus 1 oval serving plate, 2 serving bowls, 2 serving spoons, 1 serving fork and 1 sauce spoon.

Safety

Machine washing is safer than washing by hand. One in ten accidents involving kitchen knives occurs while washing up.

The **child-safety** function locks the door, making it impossible to open the dishwasher while a wash is in progress.



A Bosch dishwasher with AquaStop can be left on its own with an easy mind. As the **AquaStop** system in Bosch dishwashers protect against all water damage throughout their lifetime.



The gentle temperature progression featured by the **heat exchanger** avoids shocks as no cold water comes into contact with hot dishes during rinse cycles.

Flow-through water heater

The concealed heating element provides more space inside for your pots and pans, and the risk of overheating or deforming plastic items is greatly reduced. Plus the problem of burnt-on foods is eliminated.



Energy efficiency class: A valuable aid to decision-making when buying a new dishwasher. At a first glance, the pictograms indicate which model uses electricity most economically. The best values are achieved by models with energy efficiency class A.

Dishwashers

Dishwashers


Fully Integrated



SuperSilence, ActiveWater 60 cm dishwasher Fully integrated

SMV69T10EU

- Energy Efficiency class: A Wash Performance class: A Drying class: A
- 6 programmes: Auto 65-75°C, Auto 45-65°C, Auto 35-45°C, Economy 50°C, Quick Wash 45°C, Pre Rinse
- 4 special options: Half Load, VarioSpeed, Sanitation, IntensiveZone
- 5 cleaning temperatures
- Consumption in programme Economy 50: 10 l water / 0.98 kwh electricity / 140 min duration
- Noise level: 40 dB (re 1 pW)
- Capacity: 12+2 place settings
- ActiveWater hydraulic system
- DosageAssist
- AquaSensor, Load-Sensor
- Detergent Automation
- Heat exchanger
- Alternating spray
- Regenerative electronics
- Self-cleaning filter system with 3-fold corrugated filter
- PiezoTouchControl (black)
- Push button top controls
- Remaining programme time indicator (min)
- Acoustic end of cycle indicator
- InfoLight
- Colour of indicators: red
- Electronic delay timer: 1-24 hours
- LED salt refill indicator
- LED rinse aid refill indicator
- VarioFlexPlus basket system
- VarioDrawer
- Silver XXL baskets with pullout handle
- Rackmatic height-adjustable top basket (3 ary)
- 6 foldable plate racks in top basket
- 6 foldable plate racks in bottom basket
- 2 cup shelves in top basket
- 2 cup shelves in bottom basket
- Glass rack in bottom basket
- AquaStop with guarantee
- Childproof door lock
- Servo-lock
- Glass care system
- Front-adjustable rear foot
- Incl. Steam protection plate

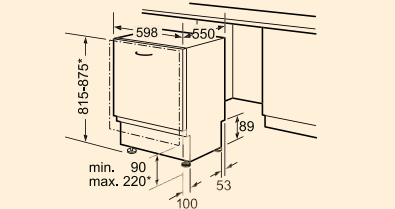

* Because of height-adjustable screw feet: when appliance height is 815, base height is 90-160 mm when appliance height is 875, base height is 150-220 mm


Fully Integrated



SuperSilence, ActiveWater 60 cm dishwasher Fully integrated

SMV55T00EU

- Energy Efficiency class: A Wash Performance class: A Drying class: A
- 5 programmes: Auto 65-75°C, Auto 45-65°C, Economy 50°C, Quick Wash 45°C, Pre Rinse
- 3 special options: Half Load, VarioSpeed, IntensiveZone
- 4 cleaning temperatures
- Consumption in programme Economy 50: 10 l water / 0.97 kwh electricity / 140 min duration
- Noise level: 44 dB (re 1 pW)
- Capacity: 12+1 place settings
- ActiveWater hydraulic system
- DosageAssist
- AquaSensor, Load-Sensor
- Detergent Automation
- Heat exchanger
- Alternating spray
- Regenerative electronics
- Self-cleaning filter system with 3-fold corrugated filter
- PiezoTouchControl (black)
- Push button top controls
- Remaining programme time indicator (min)
- Acoustic end of cycle indicator
- InfoLight
- Colour of indicators: red
- Electronic delay timer: 1-24 hours
- LED salt refill indicator
- LED rinse aid refill indicator
- VarioFlexPlus basket system
- Silver XXL baskets with pullout handle
- Rackmatic height-adjustable top basket (3 ary)
- 6 foldable plate racks in top basket
- 6 foldable plate racks in bottom basket
- Cutlery rack in top basket
- Variable cutlery basket in bottom basket
- 2 cup shelves in top basket
- 2 cup shelves in bottom basket
- Glass rack in bottom basket
- AquaStop with guarantee
- Childproof door lock
- Servo-lock
- Glass care system
- Front-adjustable rear foot
- Incl. Steam protection plate

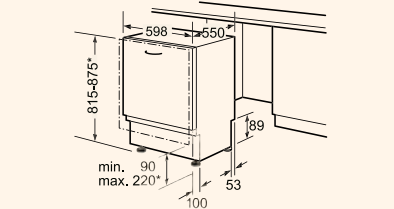

* Because of height-adjustable screw feet: when appliance height is 815, base height is 90-160 mm when appliance height is 875, base height is 150-220 mm


Integrated



SuperSilence, ActiveWater 60 cm dishwasher Integrated

SMI69T05EU - s/steel

- Energy Efficiency class: A Wash Performance class: A Drying class: A
- 6 programmes: Auto 65-75°C, Auto 45-65°C, Auto 35-45°C, Economy 50°C, Quick Wash 45°C, Pre Rinse
- 4 special options: Half Load, VarioSpeed, Sanitation, IntensiveZone
- 5 cleaning temperatures
- Consumption in programme Economy 50: 10 l water / 0.98 kwh electricity / 140 min duration
- Noise level: 41 dB (re 1 pW)
- Capacity: 12+2 place settings
- ActiveWater hydraulic system
- DosageAssist
- AquaSensor, Load-Sensor
- Detergent Automation
- Heat exchanger
- Alternating spray
- Regenerative electronics
- Self-cleaning filter system with 3-fold corrugated filter
- PiezoTouchControl (Stainless Steel)
- Push button top controls
- LCD control panel with plain text
- Remaining programme time indicator (min)
- Acoustic end of cycle indicator
- Display (black) with red marking
- Colour of indicators: red
- Electronic delay timer: 1-24 hours
- LED salt refill indicator
- LED rinse aid refill indicator
- VarioFlexPlus basket system
- VarioDrawer
- Silver XXL baskets with pullout handle
- Rackmatic height-adjustable top basket (3 ary)
- 6 foldable plate racks in top basket
- 6 foldable plate racks in bottom basket
- 2 cup shelves in top basket
- 2 cup shelves in bottom basket
- Glass rack in bottom basket
- AquaStop with guarantee
- Childproof door lock
- Servo-lock
- Glass care system
- Front-adjustable rear foot
- Incl. Steam protection plate

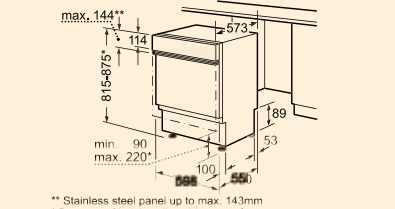

** Stainless steel panel up to max. 143mm * Because of height-adjustable screw feet: when appliance height is 815, base height is 90-160mm when appliance height is 875, base height is 150-220mm


Integrated



SuperSilence, ActiveWater 60 cm dishwasher Integrated

SMI65T25EU - s/steel

- Energy Efficiency class: A Wash Performance class: A Drying class: A
- 6 programmes: Auto 65-75°C, Auto 45-65°C, Auto 35-45°C, Economy 50°C, Quick Wash 45°C, Pre Rinse
- 4 special options: Half Load, VarioSpeed, Sanitation, IntensiveZone
- 5 cleaning temperatures
- Consumption in programme Economy 50: 10 l water / 0.83 kwh electricity / 140 min duration
- Noise level: 42 dB (re 1 pW)
- Capacity: 12+1 place settings
- ActiveWater hydraulic system
- Low temperature drying with Zeolite-System
- DosageAssist
- AquaSensor, Load-Sensor
- Detergent Automation
- Heat exchanger
- Alternating spray
- Regenerative electronics
- Self-cleaning filter system with 3-fold corrugated filter
- PiezoTouchControl (Stainless Steel)
- LCD control panel with plain text
- EmotionLight
- Push button top controls
- LCD control panel with plain text
- Remaining programme time indicator (min)
- Acoustic end of cycle indicator
- Display (black) with red marking
- Colour of indicators: red
- Electronic delay timer: 1-24 hours
- LED salt refill indicator
- LED rinse aid refill indicator
- VarioFlexPlus basket system
- Silver XXL baskets with pullout handle
- Rackmatic height-adjustable top basket (3 ary)
- 6 foldable plate racks in top basket
- 6 foldable plate racks in bottom basket
- Cutlery rack in top basket
- Variable cutlery basket in bottom basket
- 2 cup shelves in top basket
- 2 cup shelves in bottom basket
- Glass rack in bottom basket
- AquaStop with guarantee
- Childproof door lock
- Servo-lock
- Glass care system
- Front-adjustable rear foot
- Incl. Steam protection plate

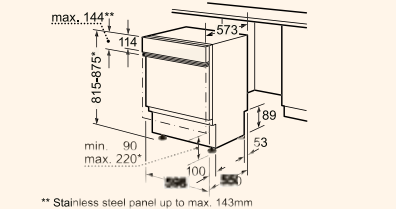

** Stainless steel panel up to max. 143mm * Because of height-adjustable screw feet: when appliance height is 815, base height is 90-160mm when appliance height is 875, base height is 150-220mm


Integrated



SuperSilence, ActiveWater 60 cm dishwasher Integrated

SMI65T05EU - s/steel

- Energy Efficiency class: A Wash Performance class: A Drying class: A
- 6 programmes: Auto 65-75°C, Auto 45-65°C, Auto 35-45°C, Economy 50°C, Quick Wash 45°C, Pre Rinse
- 2 special options: VarioSpeed, IntensiveZone
- 5 cleaning temperatures
- Consumption in programme Economy 50: 10 l water / 0.97 kwh electricity / 140 min duration
- Noise level: 42 dB (re 1 pW)
- Capacity: 12+1 place settings
- ActiveWater hydraulic system
- DosageAssist
- AquaSensor, Load-Sensor
- Detergent Automation
- Heat exchanger
- Alternating spray
- Regenerative electronics
- Self-cleaning filter system with 3-fold corrugated filter
- PiezoTouchControl (Stainless Steel)
- Push button top controls
- LCD control panel with plain text
- Remaining programme time indicator (min)
- Acoustic end of cycle indicator
- Display (black) with red marking
- Colour of indicators: red
- Electronic delay timer: 1-24 hours
- LED salt refill indicator
- LED rinse aid refill indicator
- VarioFlexPlus basket system
- Silver XXL baskets with pullout handle
- Rackmatic height-adjustable top basket (3 ary)
- 6 foldable plate racks in top basket
- 6 foldable plate racks in bottom basket
- Cutlery rack in top basket
- Variable cutlery basket in bottom basket
- 2 cup shelves in top basket
- 2 cup shelves in bottom basket
- Glass rack in bottom basket
- AquaStop with guarantee
- Childproof door lock
- Servo-lock
- Glass care system
- Front-adjustable rear foot
- Incl. Steam protection plate

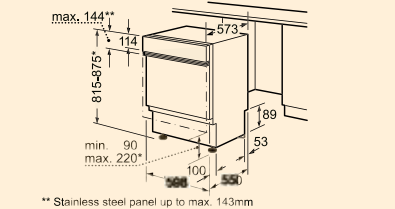

** Stainless steel panel up to max. 143mm * Because of height-adjustable screw feet: when appliance height is 815, base height is 90-160mm when appliance height is 875, base height is 150-220mm


Integrated



SuperSilence, ActiveWater 60 cm dishwasher Integrated

SMI65M15EU - s/steel

- Energy Efficiency class: A Wash Performance class: A Drying class: A
- 6 programmes: Intensive 70°C, Auto 45-65°C, Economy 50°C, Delicate 40°C, Quick Wash 45°C, Pre Rinse
- 4 special options: Half Load, VarioSpeed, Sanitation, IntensiveZone
- 5 cleaning temperatures
- Consumption in programme Economy 50: 12 l water / 1.05 kwh electricity / 140 min duration
- Noise level: 42 dB (re 1 pW)
- Capacity: 12+1 place settings
- ActiveWater hydraulic system
- DosageAssist
- AquaSensor, Load-Sensor
- Detergent Automation
- Heat exchanger
- Alternating spray
- Regenerative electronics
- Self-cleaning filter system with 3-fold corrugated filter
- Remaining programme time indicator (min)
- Programme flow display
- Colour of indicators: red
- Electronic delay timer: 1-24 hours
- LED salt refill indicator
- LED rinse aid refill indicator
- VarioFlexPlus basket system
- Silver XXL baskets with pullout handle
- Rackmatic height-adjustable top basket (3 ary)
- 6 foldable plate racks in top basket
- 6 foldable plate racks in bottom basket
- Cutlery rack in top basket
- Variable cutlery basket in bottom basket
- 2 cup shelves in top basket
- 2 cup shelves in bottom basket
- Glass rack in bottom basket
- AquaStop with guarantee
- Childproof door lock
- Childproof control lock
- Servo-lock
- Glass care system
- Front-adjustable rear foot
- Incl. Steam protection plate

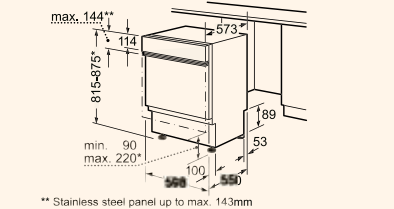

** Stainless steel panel up to max. 143mm * Because of height-adjustable screw feet: when appliance height is 815, base height is 90-160mm when appliance height is 875, base height is 150-220mm

Dishwashers

Dishwashers


Integrated



SuperSilence, ActiveWater 60 cm dishwasher Integrated

SMI63M05EU - s/steel

- Energy Efficiency class: A Wash Performance class: A Drying class: A
- 6 programmes: Intensive 70°C, Auto 45-65°C, Economy 50°C, Delicate 40°C, Quick Wash 45°C, Pre Rinse
- 2 special options: Half Load, VarioSpeed
- 5 cleaning temperatures
- Consumption in programme Economy 50: 12 l water / 1.05 kwh electricity / 140 min duration
- Noise level: 44 dB (re 1 pW)
- Capacity: 12+1 place settings
- ActiveWater hydraulic system
- DosageAssist
- AquaSensor, Load-Sensor
- Detergent Automation
- Heat exchanger
- Alternating spray
- Regenerative electronics
- Self-cleaning filter system with 3-fold corrugated filter
- Remaining programme time indicator (min)
- Colour of indicators: red
- Electronic delay timer: 1-24 hours
- LED salt refill indicator
- LED rinse aid refill indicator
- VarioFlex basket system
- Silver XXL baskets with pullout handle
- Rackmatic height-adjustable top basket (3 ary)
- 2 foldable plate racks in top basket
- 4 foldable plate racks in bottom basket
- Cutlery rack in top basket
- Variable cutlery basket in bottom basket
- 2 cup shelves in top basket
- AquaStop with guarantee
- Childproof door lock
- Childproof control lock
- Servo-lock
- Glass care system
- Front-adjustable rear foot
- Incl. Steam protection plate



** Stainless steel panel up to max. 143mm
* Because of height-adjustable screw feet: when appliance height is 815, base height is 90-160mm when appliance height is 875, base height is 150-220mm


Integrated



SilencePlus, ActiveWater 60 cm dishwasher Integrated

SMI53M05EU - s/steel

- Energy Efficiency class: A Wash Performance class: A Drying class: A
- 5 programmes: Intensive 70°C, Auto 45-65°C, Economy 50°C, Quick Wash 45°C, Pre Rinse
- 2 special options: Half Load, VarioSpeed
- 4 cleaning temperatures
- Consumption in programme Economy 50: 12 l water / 1.05 kwh electricity / 140 min duration
- Noise level: 48 dB (re 1 pW)
- Capacity: 12+1 place settings
- ActiveWater hydraulic system
- DosageAssist
- AquaSensor, Load-Sensor
- Detergent Automation
- Alternating spray
- Regenerative electronics
- Self-cleaning filter system with 3-fold corrugated filter
- Remaining programme time indicator (min)
- Colour of indicators: red
- Electronic delay timer: 1-24 hours
- LED salt refill indicator
- LED rinse aid refill indicator
- VarioFlex basket system
- Silver XXL baskets with pullout handle
- Rackmatic height-adjustable top basket (3 ary)
- 2 foldable plate racks in top basket
- 4 foldable plate racks in bottom basket
- Cutlery rack in top basket
- Variable cutlery basket in bottom basket
- 2 cup shelves in top basket
- AquaStop with guarantee
- Childproof door lock
- Childproof control lock
- Servo-lock
- Glass care system
- Front-adjustable rear foot
- Incl. Steam protection plate



** Stainless steel panel up to max. 143mm
* Because of height-adjustable screw feet: when appliance height is 815, base height is 90-160mm when appliance height is 875, base height is 150-220mm


Integrated



AquaStop, ActiveWater 60 cm dishwasher Integrated

SMI40E05EU - s/steel

- Energy Efficiency class: A Wash Performance class: A Drying class: A
- 4 programmes: Intensive 70°C, Normal 65°C, Economy 50°C, Quick Wash 45°C
- 1 special option: Half Load
- 4 cleaning temperatures
- Consumption in programme Economy 50: 14 l water / 1.05 kwh electricity / 140 min duration
- Noise level: 51 dB (re 1 pW)
- Capacity: 12+1 place settings
- ActiveWater hydraulic system
- DosageAssist
- Load-Sensor
- Detergent Automation
- Alternating spray
- Regenerative electronics
- Self-cleaning filter system with 3-fold corrugated filter
- LED programme status indicator
- Colour of LED: red
- LED salt refill indicator
- LED rinse aid refill indicator
- Programme selector with integrated start button
- Vario basket system
- LightSilver XXL baskets
- Height adjustable top basket
- 2 foldable plate racks in bottom basket
- Cutlery rack in top basket
- Cutlery basket in bottom basket
- 2 cup shelves in top basket
- AquaStop with guarantee
- Servo-lock
- Glass care system
- Front-adjustable rear foot
- Incl. Steam protection plate



** Stainless steel panel up to max. 143mm
* Because of height-adjustable screw feet: when appliance height is 815, base height is 90-160mm when appliance height is 875, base height is 150-220mm


Integrated



60 cm dishwasher Integrated

SGI45E25EU - s/steel

- Energy label: A A A
- 4 programmes: Normal 65°C, Economy 50°C, Quick Wash 45°C, Pre Rinse
- Special function: Half Load
- auto 3in1 - detergent detection
- Energy consumption in programme Economy 50: 17 l water / 1.05 kwh electricity
- 3 temperatures
- Noise: 52 dB (re 1 pW)
- Regenerative electronics
- Flow-through water heater
- Remaining programme time indicator (min.)
- Electronic delay timer: 1-19 hours
- LED salt refill indicator
- LED rinse aid refill indicator
- Retractable knob
- Height adjustable top basket
- Cutlery rack in top basket
- Aquastop anti flood device
- Front-adjustable rear foot
- Curved spray arms
- Self-cleaning filter system
- Capacity: 12 place settings



** Stainless steel panel up to max. 143mm
* Because of height-adjustable screw feet: when appliance height is 815, base height is 90-160mm when appliance height is 875, base height is 150-220mm



Bosch washer dryers give you the best performance every time.



A machine that protects and takes good care of your clothes when washing or drying them is essential. Bosch wash systems not only go easy on energy and water consumption, but protects and cares for your garments with a

wide choice of programmes to suit all laundry types. You can rest assured that our quiet, fast, economical and caring machines will banish those wash day blues!

Washer/Dryer




Fully Integrated, Washer/Dryer

WVTI2842EU

- Capacity: 5 kg washing, 2.5 kg drying
- Spin speed (rpm): 1400 - 600
- Consumption rates 4.25 kW energy consumption (washing + drying), 49 litres water consumption (coloureds 60°C)
- Fully electronic control
- Programme selector for programmes and special functions
- Non-stop washing and drying programmes for 2.5 kgs
- Woolens programme with gentle drum cradle action
- Gentle drying
- Buttons: Start/stop, quick wash, time delay, drying, spin speed reduction, door
- LED indicator for spin speed, remaining time, time delay, drying time
- Drying time selection up to 120 minutes
- Foam detection feature
- Automatic load detection system
- Unbalanced load detection system
- Aqua Secure water protection system
- AquaStop hose
- Furniture door: left-hinged, reversible
- Porthole hinged on left

Dimensions

- Appliance dimensions (HxWxD)
82.0 x 60.0 x 58.0 cm
- Built-in dimensions (HxWxD)
82.0 x 60.0 x 58.4 cm

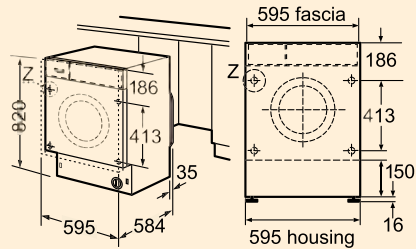


Fully Integrated Washing Machine

WIS28440GB

- Label: A / A / B
- Energy consumption: A-10%: 10% more efficient (now only 0.17kWh/kg) compared to the lowest value of energy efficiency class A (0.19 kWh/kg)
- 7 kg capacity
- Spin speed selection 1400 to 400 rpm
- AquaStop with guarantee
- Fully electronic control dial for all wash programmes
- Buttons: Start, intensive, Prewash, Reduced Ironing, Temperature, Spin speed reduction, Start delay
- Special programmes: DarkWash, Sportswear, Sensitive, Power Wash 60, Super Quick 15, Mixed load, Handwash wool, Delicates/Silk
- All programme times shorter
- Large display for programme progress indication, temperature, spin speed, remaining time and start time delay
- VarioSoft drum system
- Continuous automatic load adjustment system
- Foam detection system
- Automatic stabilisation
- Self cleaning detergent drawer
- Buzzer
- Divider for Liquid Detergent
- Door hinging interchangeable
- 30 cm porthole with 130 degree opening
- Metal door closing hook
- Noise level washing (dB): 47
- Noise level spinning (dB): 64

Dimensions

- Appliance dimensions (HxWxD)
81.8 x 60 x 55.5 cm

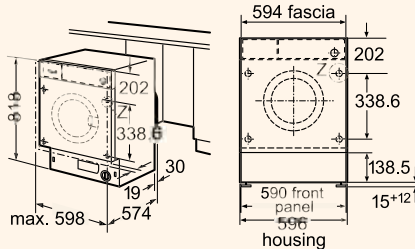



Regional Headquarters
Middle East, North Africa and South Asia
BSH Home Appliances FZE
P.O. Box 17312, Jebel Ali
Dubai, UAE
Tel: 00971 4 8030400
Fax: 00971 4 8814805

BOBI700008

www.bosch-household.ae



BOSCH

Invented for life